

**READ THESE INSTRUCTIONS THOROUGHLY BEFORE INSTALLATION KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

**IMPORTANT:**


This product must be installed by a qualified electrician or competent person, and in accordance with current building and IET wiring regulations.

**BOX CONTENTS**

This lighting fixture has been properly packed to avoid damage during transit. Before commencing with the installation carefully inspect the luminaire to confirm there is no damage. DO NOT INSTALL if any damage has occurred to the fixture or any of its components.

- Light Fitting
- Instruction Manual
- Brackets

**TOOLS REQUIRED**



- Drill / Screwdriver







- 8mm Allen Key







- Cable

**INSTALLATION INSTRUCTIONS**





**1: Wall installation**

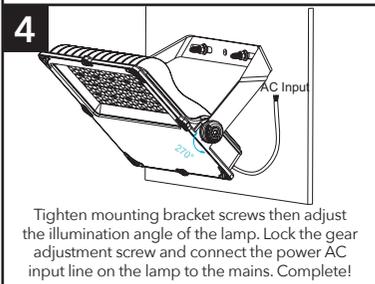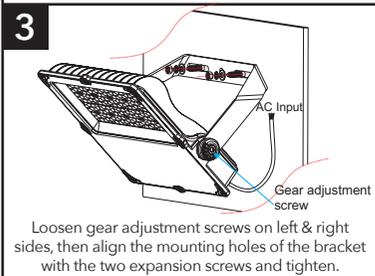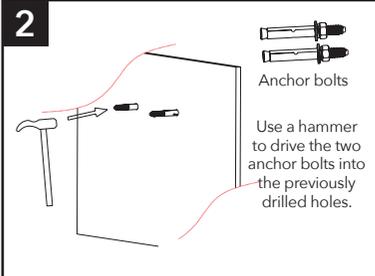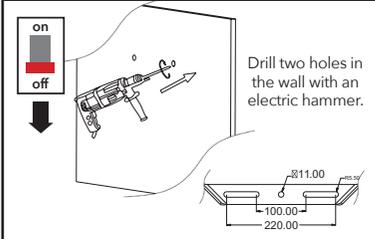

**1: Ceiling installation**

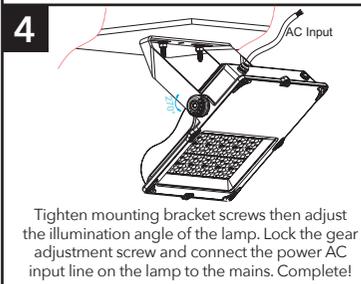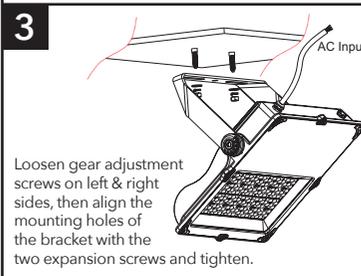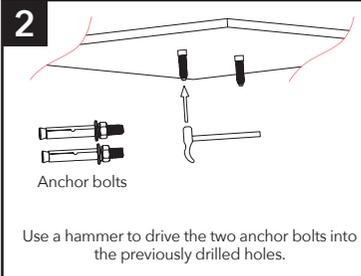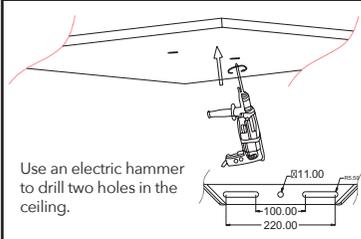

**1: Ground installation**

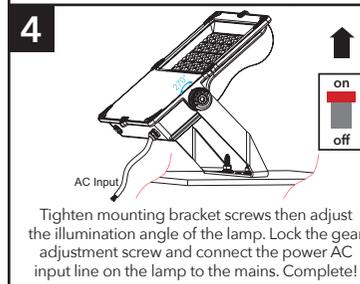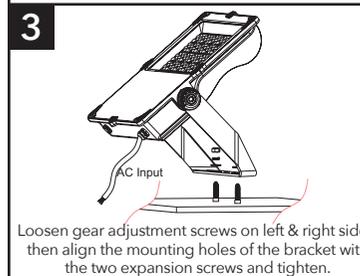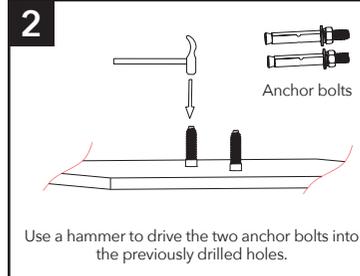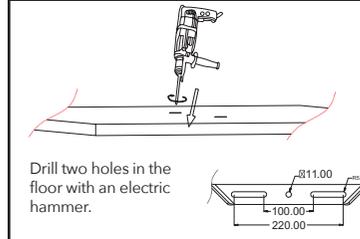


**PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLATION.**



**WARNING: Risk of electric shock! Isolate the mains power before proceeding.**

- Turn off the mains power before performing inspections, installation, or removal
- Verify that the supply voltage is correct by comparing it with the luminaire label information
- It is the installers responsibility to ensure installation is suitable for the total load of the luminaire(s). The supply cable, fuses/circuit breakers must be correctly rated for the electrical load and considering for any transient inrush currents that may occur
- Do not perform insulation strength or resistance tests on installed luminaire(s) connected

**Electrical terminal wiring**

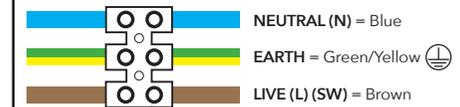

1. Isolate the circuit, drill holes for required fitting and installation type
2. Fix anchor bolts for adequate weight, see overleaf for product weights
3. Fix bracket and set angle of light fitting. **NOTE: When installing on ceiling, this light fitting can only be installed at 270° as image shows**
4. Connect mains as shown above and power on

## DISPOSAL

Disassembly instructions for end of life disposal available on website.

Disposal of Electronic Equipment WEEE Directive 2002/96/EC This product falls within the scope of the Waste Electrical & Electronic Equipment Directive (WEEE), which means the product should not be disposed of as normal household waste. Please recycle where facilities exist or check with your Local Authority. RoHS - All components and materials used in this product are RoHS 2002/95/EC compliant.

Specifications may change from time to time. The information contained in this leaflet is for guidance only and should not be considered as always accurate and should be treated as not representative.

## WARRANTY

**This luminaire is warranted for a period of 5 years from the date of purchase\*\*.** The backup battery pack in the emergency version is warranted for a period of 12 months. The warranty could be invalidated should the light fitting not be installed according to these instructions, outside the scope of the specification or the product has been altered or tampered with in any way. Please see website for terms and conditions.

## PRODUCT TEMP SPECIFICATION


Standard -20 to +45°C

Photocell -20 to +45°C

Revision 2 - November 2022

## FRANKLY PLUS FLOODLIGHT DIMENSIONS

Part No.	Description	Watts	L (mm)	W (mm)	D (mm)	Weight
430472-120	Frankly Plus Asymmetric Optic	100W	402	377	62	4.15Kg
430473-120	Frankly Plus Asymmetric Optic	150W	402	377	62	4.15Kg
430474-120	Frankly Plus Asymmetric Optic	200W	464	377	63	4.90Kg
430475-120	Frankly Plus Asymmetric Optic	240W	464	377	63	4.90Kg
430476-120	Frankly Plus Asymmetric Optic	300W	629	377	77	7.20Kg
430477-120	Frankly Plus Asymmetric Optic	400W	629	377	77	7.20Kg

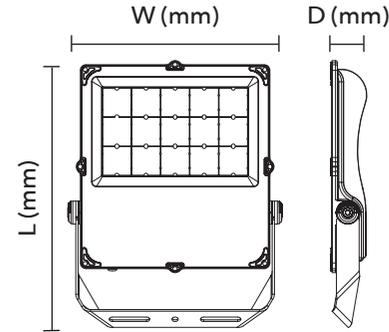

Also available in 100° optic versions.

This product contains a light source of energy efficiency Class E.

Technical Helpline: +44 (0)1507 328031

\*\* Please see our website for more detailed information on warranty.