


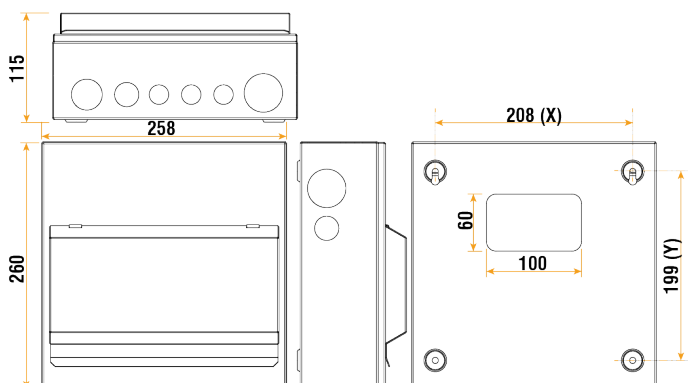

General Information

Dimensions With Door (mm)	258 (W) x 260 (H) x 115 (D)
Enclosure Dimensions (mm)	222 (W) x 260 (H) x 92 (D)
Colour	White
Materials	Enclosure & Cover: Powder Coated Steel DIN Rail: Galvanised Steel
Rated Operational Voltage (AC) (Ue)	230
Frequency (Hz)	50/60
Maximum Rated Current (A) (In)	100
Free Ways	10
Total Ways	10
Blanks Supplied	2 (Product Code: CU1BLANK)
E&N Terminals	Screw
E&N Bars Capacity (mm ²)	
Tail Clamp Capacity (mm ²)	
Enclosure Side Knockouts (Ømm)	1 x 25 & 1 x 40
Enclosure Top Knockouts (Ømm)	4 x 20, 1 x 32 & 1 x 40
Enclosure Bottom Knockouts (Ømm)	4 x 20, 1 x 32 & 1 x 40
Enclosure Rear Knockouts (mm)	100 x 60
Impact Rating	IK05
Ingress Protection	IP20
Maximum Humidity (%)	95
Storage Temperature (°C)	-40 to +75
Operational Temperature (°C)	-5 to +40
Warranty (Years)	10

E&N Bars Torque (Nm) 2
Tail Clamp Torque (Nm) 1.5

Standards BS EN 61439-3

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Elucian metal consumer units allow compliance with BS 7671 Wiring Regulations

