



Tough-Shell Bulkhead

The Integral IP44 Tough-Shell Bulkhead is suitable for all indoor areas such as hallways, stairways, walls and ceilings including bathrooms (Zone 2) and covered (sheltered) external areas, such as porches. The Tough-Shell is engineered from tough, high-grade polycarbonate material and has a long life expectancy of 25,000 hours, based on normal usage.



1




1

Product Code	IP Rating	Watts (W)	IK Rating	Temp K	Lumens lm	Lumens per watt	CRI >=	Beam Angle	Dimensions mm	Pic.
IP44 Tough-Shell Bulkhead									25,000 hrs, 2 year warranty	
Non-Dimmable										
ILBHA001	IP44	12	IK09	4000	924	77	80	200°	Ø 250 x H: 102 mm	1
ILBHA002	IP44	18	IK09	4000	1350	75	80	200°	Ø 300 x H: 102 mm	1
ILBHA003	IP44	24	IK09	4000	1750	73	80	200°	Ø 350 x H: 102 mm	1

Square Slimline Ceiling and Wall Light

Featuring a stylish square casing with a slim body depth of only 50mm. Engineered from tough, high-grade polycarbonate material.

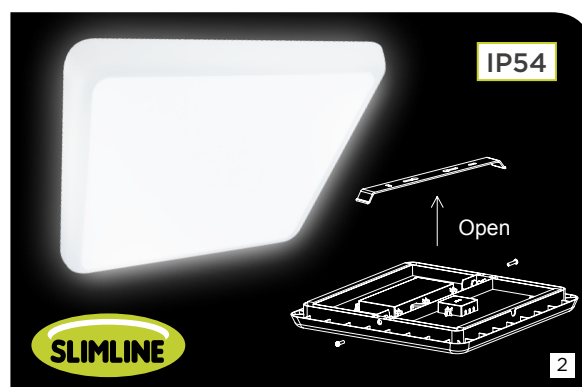

Product Code	IP Rating	Watts (W)	IK Rating	Temp K	Lumens lm	Lumens per watt	Beam Angle	Function	Dimensions mm	Pic.
IP54 Square Slimline Ceiling and Wall Light									40,000 hrs, 3 year warranty	
Non-Dimmable										
ILBHD021	IP54	12	IK08	4000	1056	88	120°	-	L: 250 x W: 250 x H: 50 mm	2
ILBHD022	IP54	12	IK08	4000	1056	88	120°	Emergency	L: 250 x W: 250 x H: 50 mm	2
ILBHD023	IP54	12	IK08	4000	1056	88	120°	Microwave Sensor	L: 250 x W: 250 x H: 50 mm	2
ILBHD024	IP54	12	IK08	4000	1056	88	120°	Microwave + Emergency	L: 250 x W: 250 x H: 50 mm	2