

INCEPTOR® B-LITE



Technical Specification

Product Code: OV82150EMDA

Luckinslive 433365493



Description: 60W 1500mm Linear LED Batten With Emergency & DALI

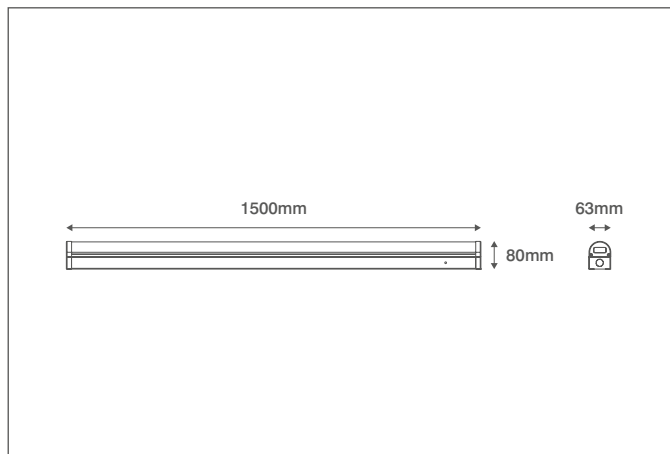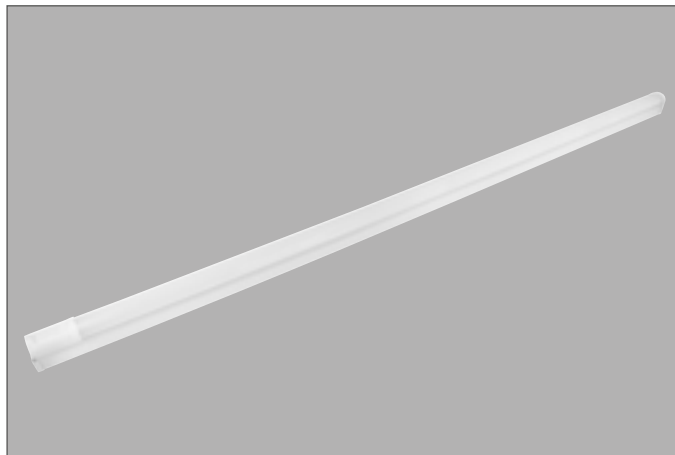

General Information

Dimensions (mm)	1500 (L) x 63 (W) x 80 (D)
Materials	Base: Powder Coated Steel; Opaque Diffuser: Polycarbonate
Base Finish	White (RAL 9003)
Product Weight (Kg)	1.9
Ingress Protection	IP20
Impact Rating (IK)	08
Mounting	Ceiling or Wall
Warranty (Years)	5
Battery Warranty (Years)	4
On Site Warranty	1 Year Unregistered, 2 Year Registered (https://oviauk.com/on_site_warranty)

Additional Information

DALI dimmable driver
DALI versions are not as standard

Compatible Accessories

OSUSS15 - 2 x Suspension Cable for Linear Luminaires

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	64
Input Current (mA)	300
Inrush Current/Time	0.3A (<0.5S)
Power Factor	>0.9
Operating Temperature (°C)	0 to +45
Critical Temperature (°C)	+80
Input Terminations	4 Pole Push Fit Terminals

Luminaire Output


Colour Temperature (K)	4000
Colour Render Index (CRI)	>80
Efficacy (lm/W)	98
Beam Angle (°)	120
Flicker Free	Yes
Emergency Luminous Flux (lm)	280
LED Lifetime (L70) (Hours)	50000

Emergency Backup Information

Emergency Luminous Flux (lm)	280
Battery Specification	6.4V 1500mAh LiFePo4
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

Dimming Information

Dimmable	Yes
Dimming Format	DALI
Dimming Input Termination	2 DALI Terminals
Analogue (1-10V) Information	See driver for information

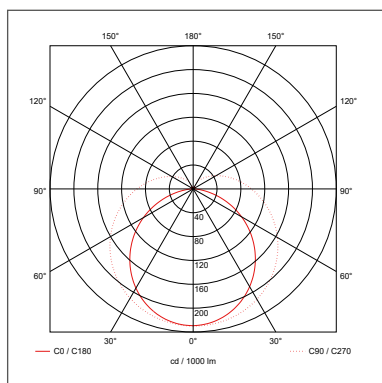

OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

