

LED IP44 Recessed Downlights

LED IP44 Recessed Downlights

IP44

WARRANTY
2
YEAR

120°
BEAM ANGLE

20,000 HOURS
LIFETIME

AVAILABLE FINISHES

WHITE



Pre-wired
flow
Connector

COLOUR TEMPERATURE


WARM
WHITE

COOL
WHITE

CODE	DESCRIPTION
OV6209WW	9W 150mm Diameter Downlight 3000K - White
OV6209CW	9W 150mm Diameter Downlight 4000K - White

PRODUCT INFO		
CCT (K)	3000K	4000K
Lumens	600lm	600lm
Efficacy	67lm/W	67lm/W
Wattage	9W	
CRI	>80	
Beam Angle	120°	
LED Lifetime	20,000 Hours	
Voltage	230V ~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

COMPATIBLE PRODUCTS	See page 121
OVEMCG50	3 Hour Emergency Pack

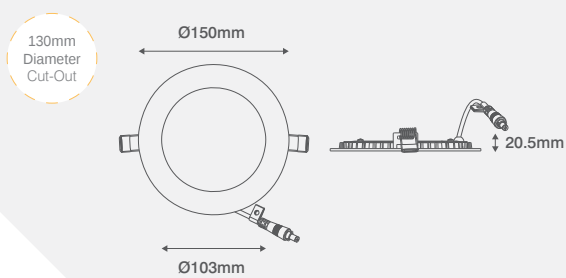

Inline LED Driver & prewired Flow™ Connector

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 62031 EN 61347-1 EN 61347-2-13 EN 62493



AVAILABLE FINISHES

WHITE



Pre-wired
flow
Connector

COLOUR TEMPERATURE


WARM
WHITE

COOL
WHITE

PRODUCT INFO		
CCT (K)	3000K	4000K
Lumens	850lm	850lm
Efficacy	70lm/W	70lm/W
Wattage	12W	
CRI	>80	
Beam Angle	120°	
LED Lifetime	20,000 Hours	
Voltage	230V ~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

CODE	DESCRIPTION
OV6212WW	12W 170mm Diameter Downlight 3000K - White
OV6212CW	12W 170mm Diameter Downlight 4000K - White

COMPATIBLE PRODUCTS	See page 121
OVEMCG50	3 Hour Emergency Pack

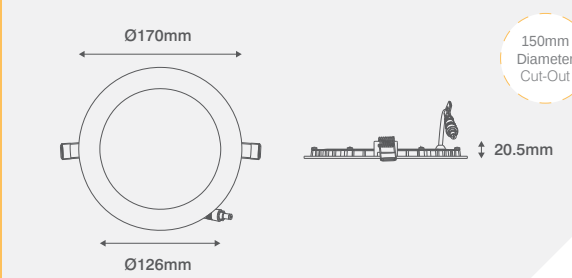

PRODUCT APPROVALS

Inline LED Driver & prewired Flow™ Connector

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 62031 EN 61347-1 EN 61347-2-13 EN 62493

