


Lynx LED Wallpack

Supplied c/w Integral Driver



351

- Robust wall mounted luminaire for general accent illumination
- Integral emergency option provides downward illumination with a beam angle of 60°
- Die-cast aluminium body with vandal resistant polycarbonate Fresnel lens diffuser
- Tamper-proof allen key screws supplied as standard
- Multiple conduit entry and BESA box fixing points
- Photocell and sensor options
- LED lifespan L70 56,000 hours

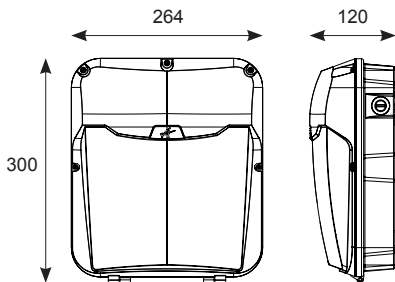


Powered by
TRIDONIC
enlightening your ideas



Emergency Standby



Emergency Operation

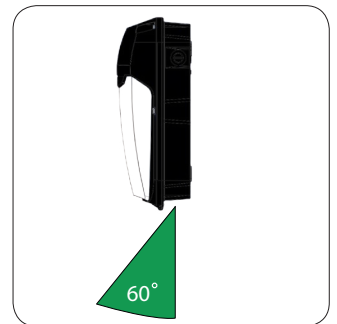

Emergency Mode Beam Angle

LED Information

Total (Watts)	29W
Lumens Delivered	1798lm
Lm/W	60lm
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	0°C to 25°C

	Code	Lamp	Description
	ALWPLED	LED	29W - Cool White
Options	/PC		Electronic Photocell
	/MWS		Integral Microwave Sensor
	/M3		Emergency



Warrington: +44 (0) 1942 433333
Belfast: +44 (0) 2890 773750

