

NVC UK - NVC Lighting Limited  
NVC Park 201, Hollymoor Way, Rubery,  
Birmingham, B31 5HE  
T +44 (0)121 457 6340  
E sales@nvcuk.com

NVC NORDICS - NVC Lighting AB  
Albybergsringen 3b 137 69 Österhaninge  
T +46(0)8 735 55 40  
Sweden info@nvc-lighting.se  
Finland info@nvclighting.fi  
Denmark info@nvc-lighting.dk



## DATASHEET

### ARLINGTON LIFE

Arlington LiFe Euro Legend Up Pack


Euro Legend  
Changeable Acrylic Screen Printed Exit Legends  
Green to Pantone 3405CVC Background



GENERAL INFORMATION	
Product Code	NAL/LE/UP
Product Range	Emergency
Product Category	Emergency
IP Rating	N/A
IK Rating	N/A
Warranty	N/A
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=N/A, H=N/A
Dimensions Square/Rectangular (L x W x H) (mm)	L=318, W=0.25, H=165
Cut-out Size (mm)	N/A
Product Weight (Kg)	0.05
CONSTRUCTION	
Body Material	Acrylic
Body Colour	Clear
Optical Material	N/A
Optical Finish	N/A
Termination	N/A
Driver - Intergal or Remote	N/A
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight inc. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	N/A
Power Consumption (W)	N/A
LED Lumens (lm/W)	N/A
Efficacy (l.lm/c.W)	N/A
Operating Temp. (Min/Max)	0°C to 25°C
LIGHT SOURCE	
Type	N/A
Correlated Colour Temp.	N/A
Colour Rendering Index (CRI)	N/A
Lumen Depreciation	N/A
SDCM	N/A
ELECTRICAL INPUT	
VOLTAGE (V)	N/A
Operating Frequency	N/A
In Rush	N/A
Drivers per MCB*	N/A
Class	N/A
Power Factor	N/A
Cable Entry	N/A
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5055943063037

\* GUIDE ONLY

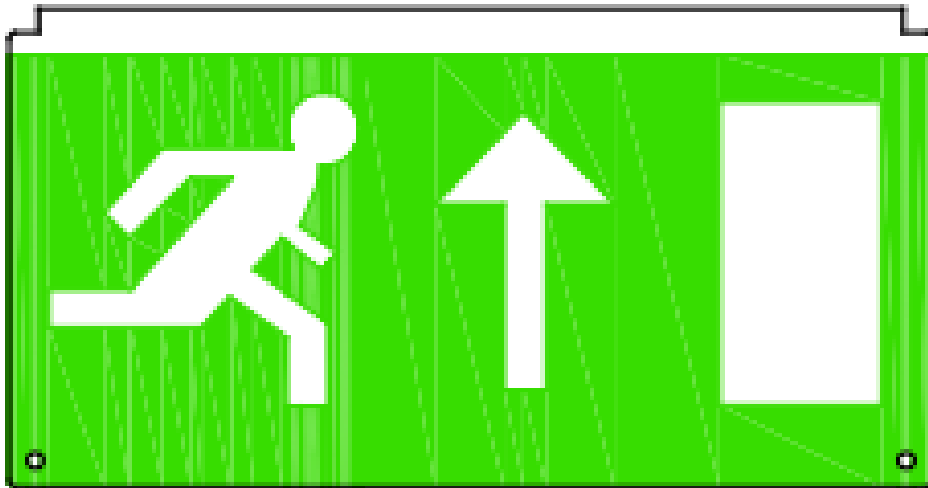

NAL/LE/UP