




13A Lockable Fused Modules


GM2047-LPW	13A Fused Lockable Module - White
GM2047-LBK	13A Fused Lockable Module - Black
GM2047-LPWBR	13A Fused Lockable Module - White - Polished Brass
GM2047-LPWBS	13A Fused Lockable Module - White - Brushed Stainless
GM2047-LPWCH	13A Fused Lockable Module - White - Polished Chrome
GM2047-LPWPB	13A Fused Lockable Module - White - Pearl Nickel
GM2047-LPWSB	13A Fused Lockable Module - White - Satin Brass
GM2047-LPWSC	13A Fused Lockable Module - White - Satin Chrome
GM2047-LPWSS	13A Fused Lockable Module - White - Stainless Steel
GM2047-LBKAB	13A Fused Lockable Module - Black - Antique Brass
GM2047-LBKBN	13A Fused Lockable Module - Black - Black Nickel
GM2047-LBKBR	13A Fused Lockable Module - Black - Polished Brass
GM2047-LBKBS	13A Fused Lockable Module - Black - Brushed Stainless
GM2047-LBKCH	13A Fused Lockable Module - Black - Polished Chrome
GM2047-LBKPN	13A Fused Lockable Module - Black - Pearl Nickel
GM2047-LBKSB	13A Fused Lockable Module - Black - Satin Brass
GM2047-LBKSC	13A Fused Lockable Module - Black - Satin Chrome
GM2047-LBKSS	13A Fused Lockable Module - Black - Stainless Steel

Standards: Fused Module: BS 1363-4: 1995
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

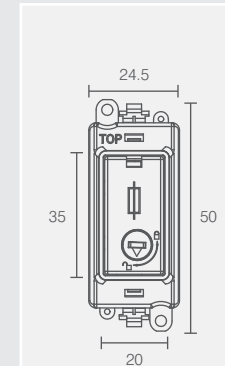

TYPICAL WIRING DIAGRAM

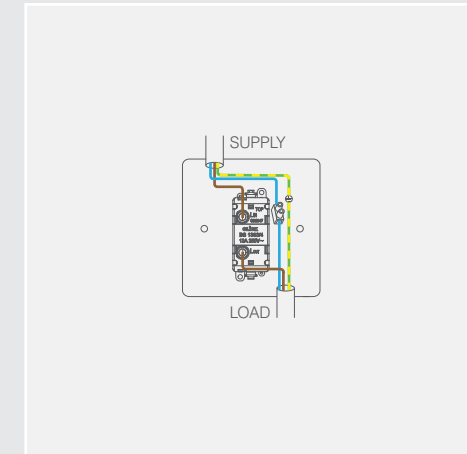

Material Composition

Module Front: Urea or Urea + Stainless Steel Cover (Ingot)
 Cover, Insert & Rear Housing: Nylon
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated

Voltage	250V ~ 50Hz
Current Rating	13A
Terminal Size	5mm Ø
Torque Value	1.2Nm
Cable Size	2 x 4mm ² , 3 x 2.5mm ² or 1 x 6mm ²
Back Box Depth	25mm - 47mm (Deco, Deco Plus, Mode, Polar) 35mm - 47mm (Define, Definity)
Lockable	GM2047-L Only
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Modules Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 1363-4: 1995

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 13A; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.