


## STRATUS PRO

The Stratus range of backlit LED panels offers superior light distribution and proven reliability. White painted steel body, backlit LED module with high efficiency optical design and opal diffuser suitable for use in 15 or 24mm standard exposed grid ceilings. The Stratus Pro comes complete with our new innovative fast-fix loop-in loop-out integrated driver saving valuable time on installation. Range of accessories available, see page 59.

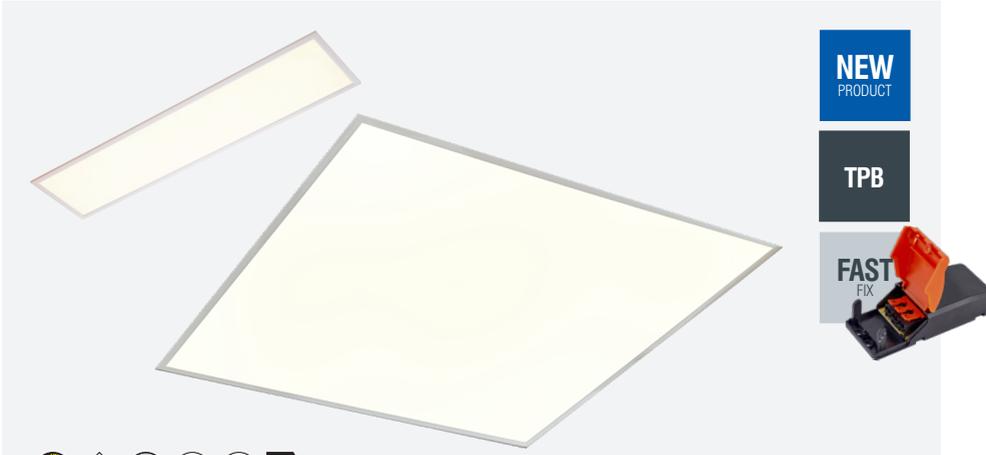

**NEW PRODUCT**

**TPB**

**FAST FIX**




- Wide PCB of light sources (SMD) with super heat radiation, low decay of light and long lifespan.
- High brightness and efficiency with even light distribution, no bright spots, no dark areas.
- No discolouring of the diffuser over time (yellowish diffuser problem of conventional edge-lit LED panels).
- Pmma optic lenses with high light transmission rate, and larger beam angle.
- Emergency LED conversion kits available (92514 & 91944), see page 280-281
- Fast fix connector not included with 92276 & 92277

CODE	DESCRIPTION	WATT	K	LM	LM/W	DIMENSIONS
92272	Stratus	40W	3000	3600	90	Sq: 595mm H: 30mm
92273	Stratus	40W	4000	3700	93	Sq: 595mm H: 30mm
92274	Stratus	40W	6000	3700	93	Sq: 595mm H: 30mm
92270	Stratus High Lumen	32W	4000	3360	105	Sq: 595mm H: 30mm
92542	Stratus	40W	4000	3700	93	W: 295mm L: 1195mm H: 30mm
92276	Stratus*	50W	4000	6000	120	W: 595mm L: 1195mm H: 30mm
92277	Stratus*	50W	6000	6000	120	W: 595mm L: 1195mm H: 30mm
81007	Triac dimmable driver	40W				
92246	Dali dimmable driver	40W				
92247	Dali dimmable driver	60W				

## STRATUS UGR19

The Stratus range of backlit LED panels offers superior light distribution and proven reliability. White painted steel body, backlit LED module with high efficiency optical design and opal diffuser suitable for use in 15 or 24mm standard exposed grid ceilings. The Stratus Pro comes complete with our new innovative fast-fix loop-in loop-out integrated driver saving valuable time on installation. Range of accessories available, see page 59.

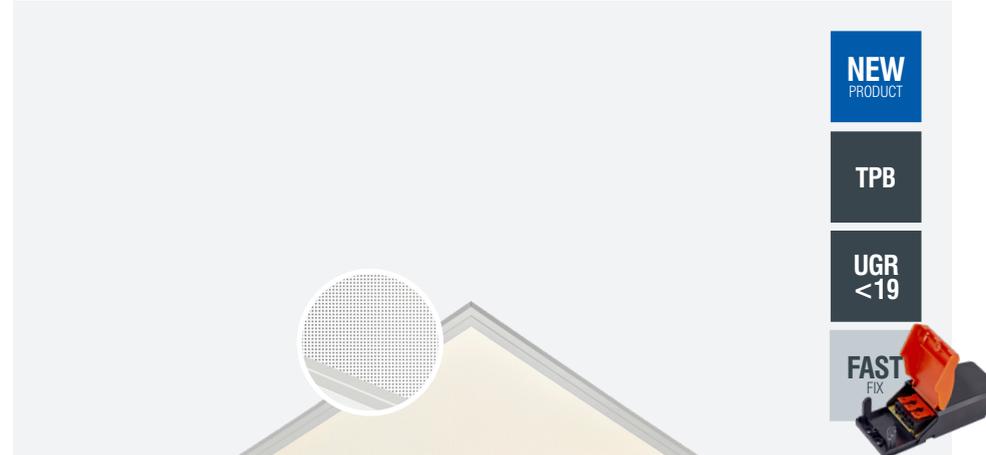

**NEW PRODUCT**

**TPB**

**UGR <19**

**FAST FIX**



- Backlit panel
- Constructed from aluminium alloy, steel & polystyrene
- 40W LED module (SMD)
- White finish
- Emergency LED conversion kits available (92514 & 91944), see page 280-281

CODE	DESCRIPTION	WATT	K	LM	LM/W	DIMENSIONS
81026	Stratus 40W UGR19	40W	4000	3400	85	Sq: 595mm H: 30mm
81007	Triac dimmable driver	40W				
92246	Dali dimmable driver	40W				