

STEP LIGHTS SPECIFICATION SHEET



WL340

Asymmetric, straight to mains, brush finish step light

FEATURES

IP rating	IP67
Colour flexibility	Fixed colour
Walk Over / Drive Over	Walk over
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Cut Out Size	Ø 80mm
Bathroom zone	2
Inrush Current	9A 0.8ms
Construction Material	Stainless steel (316)
Weight	1000g
Maximum ambient temperature	35°C
SELV	Yes
Electric Class (1, 2, 3)	1

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
WL340NW	2.6W	4000K	50°	59	22	65
WL340WW	2.6W	3000K	50°	50	19	54
WL34027	2.6W	2700K	50°	49	19	52

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	220-240V	N/A	No	2	N/A	N/A

ACCESSORIES

Installation tube included	
JB5	Gel filled waterproof connector
WC 5-9	Quick release waterproof joint



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

- /collingwoodlighting
- /collingwoodlighting
- collingwoodled

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

Recessed, asymmetric wall or ground light perfect for illuminating walls, steps and pathways

Straight to mains for easy retrofit


Available in rustic cast stainless steel and sleek brushed stainless steel finishes

Installation tube included

Light source
energy efficiency:



Beam angles: 50° C0/C180 50°
C90/C270

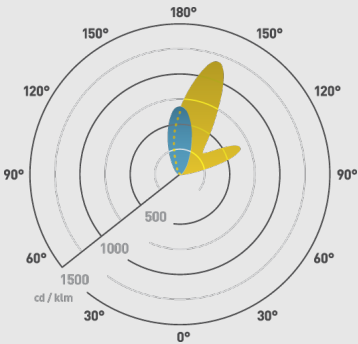

Ø98mm

