

RP RADIANT CEILING PANELS



RP3-03



RP3-06

Function Energy saving means of heating commercial premises

Applications Offices
Trade counters
Care homes
Meeting rooms

Features Radiant heat without light output
Quick and easy installation into a standard (24mm) suspended ceiling grid
Bracket provided for easy mounting onto a conventional ceiling
Attractive white easy-clean finish (RAL9010)
IP44 rated

Heaters

Model	kW
RP3-03	0.3
RP3-06	0.6

Technical

Model	kW	Volts	Dimensions (mm)			Recommended Mounting Height (m)		Weight (kg)
			H	W	D	Min	Max	
RP3-03	0.3	230	25	592	592	2.4	4.0	5.9
RP3-06	0.6	230	25	1192	592	2.4	4.0	11.3

Accessories

	Model	Description	Details
	RD16	Electronic programmable thermostat 16A (recessed)	Page 114
	RT16	Programmable thermostat 16A	Page 115
	RT26	Programmable thermostat 26A	Page 115
	WD16	Wi-Fi electronic thermostat 16A (recessed – free app)	Page 116
	WT16	Wi-Fi thermostat 16A (download free app)	Page 116
	WT26	Wi-Fi thermostat 26A (download free app)	Page 117
	CXS	Optional remote-mounted temperature sensor for use with RT or WT thermostats	Page 130
	RST2-IN	Adjustable room thermostat 20A	Page 112
	RST-TP	Tamperproof thermostat 20A	Page 112


For larger installations we recommend our PC control box – see pages 106-109



Swimming Pool Changing Rooms

Location: Guildford, Surrey

Installed: 6 x 300W Radiant Ceiling Panels

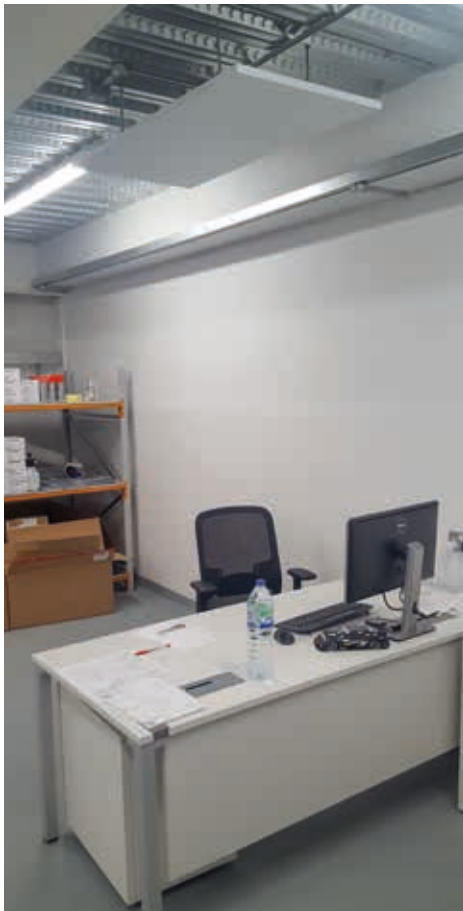

Aston Martin

Location: Bristol

Installed: 4 x 600W Radiant Ceiling Panels