

SMART SYNC iPANEL

iPANEL is the ultimate solution in SMART LED recessed ceiling panels. RGB+CCT tunable technology and multiple colour changing options enables different lighting applications within the same space. Select the correct white temperature to suit your environment... from offices and classrooms to gyms and sensory spaces. iPANEL is the perfect choice and can be easily synchronised with other SMART SYNC products.




FORMULA E TRAINING HQ - BANBURY



DL595-CCT



DL595-RGBCCT

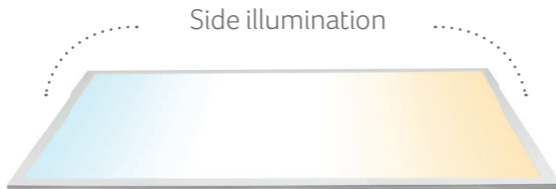

DL1260-CCT



DL1260-RGBCCT

INSTALLATION



T-CONS
Controller
*required



T-24V
Power Supply
*required


Can incorporate into the SMART SYNC system

ACCESSORIES



DL595-KIT
DL1260-KIT

Suspension kit




DL595-SMKIT
DL1260-SMKIT

Surface mountable kit

TECHNICAL DATA

DL595-RGBCCT

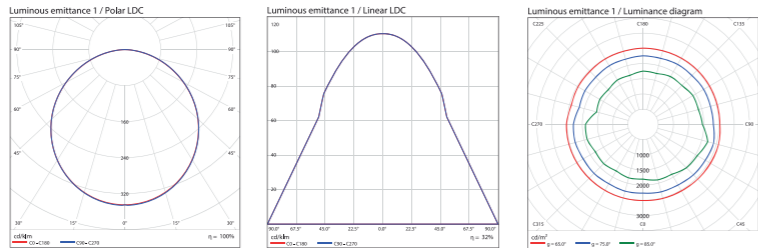

FEATURES

- Smart colour tunable recessed LED panel
- Adjustable white temperature 2700K - 6500K
- RGB multi colour changing options
- Smooth dimming technology
- Auto-sync and auto-send communication
- Shadow free - even light output
- Shallow recess depth
- IP40 Protection
- Aluminium frame and PC diffuser
- Free from electromagnetic interference
- Control independently or synchronise
- Ideal for office, commercial and retail spaces



VECTOR VR - NORWICH



Human Centric Lighting - PANEL can be with intelligent smart controllers used to create a more natural working environment that simulates the changes in daylight and enhances well-being.

APP CONTROL



T-WiFi2
2.4 GHz WiFi Controller



GAP LIGHT APP
SMART Control

SMART CONTROL



T-Touch CCT
Touch remote

T-8Z-WALL
8-zone touch remote

T-8Z-REMOTE
8-zone touch remote



2700K - 3000K - 3500K - 4000K - 4500K - 5000K - 5500K - 6000K - 6500K



Model	Power	Input	Luminosity	Material	Beam	IP	Dimensions
DL595-CCT	40W	24V	3600 lm	Aluminium	170°	IP40	595mm x 595mm
DL595-RGBCCT	40W	24V	3320 lm	Aluminium	170°	IP40	595mm x 595mm
DL1260-CCT	60W	24V	5540 lm	Aluminium	170°	IP40	1150mm x 595mm
DL1260-RGBCCT	60W	24V	4980 lm	Aluminium	170°	IP40	1150mm x 595mm