



AAZCLED100



Features

Marine grade construction ideal for coastal and adverse weather, swimming pool and chemical plant applications

High purity aluminium construction, surface electrophoresis and corrosion-proof treatment

Concentrated saline 3000 hour salt spray test to EN ISO 9227

316L stainless steel mounting bracket and fixings

Suitable for highly corrosive environments; including coastal and swimming pool applications

High output, high efficiency floodlight

Pre-installed breathable gland prevents internal moisture accumulation

High specification IP66, IK08 ratings

120° beam angle

100W exceeds performance of 150W HQI-TS

Pre-wired with 1.5 metre of rubber insulated cable for ease of installation

LED lifespan L80 B10 54,000 hours

General Information

Lamp Type	LED
IP Rating	IP66
IK Rating	IK08
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Warranty (Years)	5
CE Mark	Yes
Width (mm)	230
Height (mm)	314
Depth (mm)	61

Technical Information

Wattage 100W

Lumens Delivered 14750lm

Lm/W 148lm

CRI Ra 70


CCT 5000K

Input 230V

Hertz 50/60Hz

Operating Temp -30°C to 50°C

Datasheet generated from <https://onetimepim.com> last updated Monday, December 6, 2021 3:17:37 PM

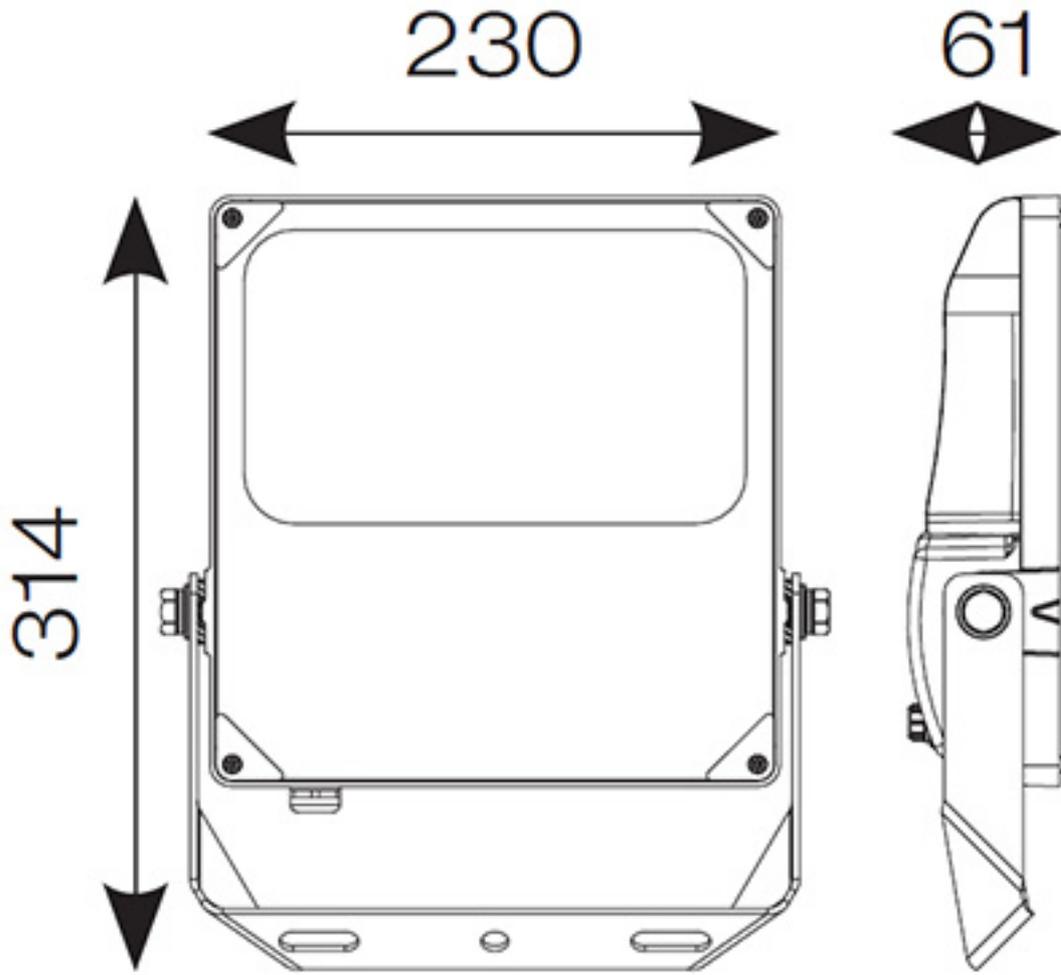

AAZCLED100