


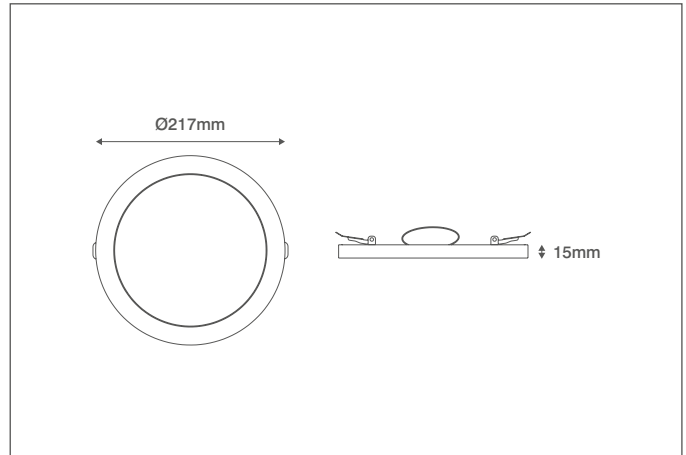

General Information

Dimensions (mm)	217 (Dia.) x 15 (D)
Materials	Body: Polycarbonate; Diffuser: Polystyrene
Colour	White (RAL9016)
Product Weight (Kg)	0.4
Cutout Diameter (mm)	55
Ingress Protection	IP20
Maximum Ceiling Thickness (mm)	20
Warranty (Years)	3
On Site Warranty	1 Year Unregistered, 2 Year Registered (https://oviauk.com/on_site_warranty)

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	II
Circuit Wattage (W)	18
Input Current (mA)	90
Inrush Current	3A (10ms)
Power Factor	>0.9
Driver Information	Integrated
Operating Temperature (°C)	-20 to +40
Maximum Critical Temperature (°C)	+50
Input Mains Cable	2 x 0.75mm ² H03VVH2-F (250mm)

Luminaire Output


Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	1270	1350	1260
Efficacy (lm/W)	70	75	70
Beam Angle (°)	110		
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	30000		

Dimming Information

Dimmable	Yes
----------	-----

Compatible Accessories

OVBZ6418SC - Fascia Ring For 18W Downlight - Satin Chrome
 OVBZ6418CH - Fascia Ring For 18W Downlight - Chrome
 OVBZ6418BK - Fascia Ring For 18W Downlight - Black



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
 Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

