



Technical Specification




Luckinslive 407676888



Description: 2 Gang GridPro With Twin New Media Aperture Combination Plate

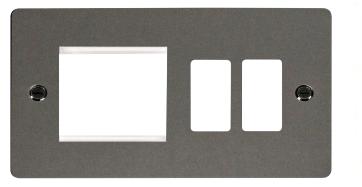



General Information

Range	<u>define</u> [•]	
Plate Dimensions (mm)	146 (W) x 88 (H) x 1.3 (D)	
Dimensions With Gasket (mm)	146 (W) x 88 (H) x 3 (D)	
Plate Fixing Centres - Horizontal (mm)	120.6	
New Media Aperture Dimensions (mm)	50 x 50	
GridPro Module Quantity	2	
Style	Define	
Finish	Black Nickel	
Gasket Colour	Transparent (Neoprene)	
Materials	Front Plate: Stainless Steel	Inse
	Terminals: Brass	Teri
	Earth Strap: Mild Steel	
Anti Microbial Certified	No	
Termination Type	Screw	
Modular Rocker Switches	Yes	
Yoke Required	No	
Minimum Back Box Depth (mm)	Dependent On Modules Fitted	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	20	
Standards BS 5733		

Insert: Nylon Terminal Screws: Steel & Yellow Passivated

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Interchangeable with modules in the GridPro and New Media Ranges.



Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom T: +44 (0)1827 63454 | F: +44 (0)1827 63362 E: sales@scolmore.com | W: scolmore.com









