

12V Diffused LED Surface Mounted

- Opal diffuser for uniform light
- 2m input lead with TOP connector
- Requires 12V LED driver

68mm dia.
depth 14mm



12V 2W LED IP20 TOP 2.0m

PART NO.	LUMENS	CCT	COLOUR TEMP	FINISH
DLKSM-SS-WW	150	3000	WARM WHITE	BRUSHED NICKEL
DLKSM-SS-NW	155	4000	NEUTRAL WHITE	BRUSHED NICKEL
DLKSM-SS-CW	160	6000	COOL WHITE	BRUSHED NICKEL
DLKSM-CH-WW	150	3000	WARM WHITE	CHROME
DLKSM-CH-CW	160	6000	COOL WHITE	CHROME

12V Diffused LED Recessed

- Opal diffuser for uniform light
- 2m input lead with TOP connector
- Requires 12V LED driver

65.5mm dia.
depth 10mm




12V 2W LED IP20 TOP 2.0m 61mm

PART NO.	LUMENS	CCT	COLOUR TEMP	FINISH
DLK-SS-WW	150	3000	WARM WHITE	BRUSHED NICKEL
DLK-SS-NW	155	4000	NEUTRAL WHITE	BRUSHED NICKEL
DLK-SS-CW	160	6000	COOL WHITE	BRUSHED NICKEL
DLK-CH-WW	150	3000	WARM WHITE	CHROME
DLK-CH-CW	160	6000	COOL WHITE	CHROME

12V Diffused LED Triangle

- Opal diffuser for uniform light
- 2m input lead with TOP connector
- Requires 12V LED driver

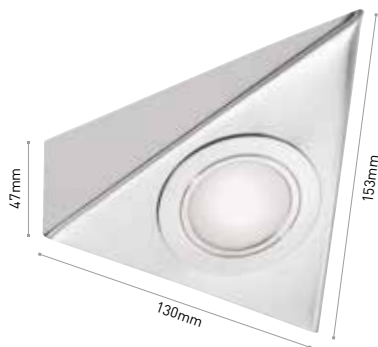

12V 2W LED IP20 TOP 2.0m

PART NO.	LUMENS	CCT	COLOUR TEMP	FINISH
TRK-SS-WW	150	3000	WARM WHITE	BRUSHED NICKEL
TRK-SS-NW	155	4000	NEUTRAL WHITE	BRUSHED NICKEL
TRK-SS-CW	160	6000	COOL WHITE	BRUSHED NICKEL