

Commercial downlights



Colour temperature
switchable,
3000K-4000K-6000K




Highly efficient 120
Lm/W ensures low
running costs



Quick and easy
installation with plug &
play connectors

Guarantee	5 years (product), 2 years (on-site)
Wattage	20W
IP rating	IP54 (from below) IP20 (from above)
Dimmable	Yes (DALI 2, 0-10V, PUSH-DIM)
CRI	80 Ra
TP rating	TP(a)
Input	220-240V 50/60Hz
Emergency version available	Yes, using converter. See accessories section.
Install connector type	Push-fit terminal, loop-in/loop-out
Cut-out size	200mm (+8mm/- 2mm)
Electric class	2

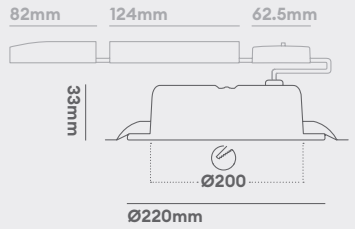

Thea Lite CSP 200mm

Colour Switchable IP54 Downlight

2 year
on site
guarantee



Product code	Finish	Dimmable	Driver	W	Colour	Beam	lm	lm/W
THL3N	White RAL9003	On-Off	Driver Included	20W	3000K	90°	2200	110
					4000K	90°	2400	120
					6500K	90°	2400	120
THL3X	White RAL9003	Dimmable	Driver Excluded Use PS250600MA	20W	3000K	90°	2200	110
					4000K	90°	2400	120
					6500K	90°	2400	120

*Emergency packs sold separately

Product code	Description
LEDEPI0EM	Emergency pack for converting into emergency manual-test option
LEDEPI0	Emergency pack for converting into emergency self-test option
LEDEP09ADA	Emergency pack for converting into DALI emergency self-test option