


Product Code: SFSS30036GY

Luckinslive 433612230

Description: 13A 2 Gang Zigbee Smart Switched Socket Outlet & Cover Plate

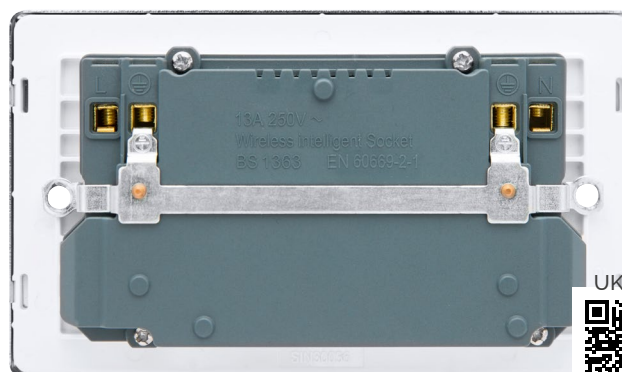

UK PS&TI



General Information

	Range	definity™	
Insert Dimensions (mm)	142.5 (W) x 82.5 (H) x 2.5 (D)		
Plate Dimensions (mm)	146 (W) x 86 (H) x 4 (D)		
Plate Fixing Centres - Horizontal (mm)	120.6		
Style	Screwless Insert & Cover Plate		
Finish	Stainless Steel		
Insert Colour	Grey		
Materials	Insert: Polycarbonate		Cover Plate: Stainless Steel
	Rear Housing: Nylon		Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated		Internal Busbars: Formed Pressed Brass
	Electronics: PCB & Electronic Components		
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	13		
Termination Type	Screw		
Terminal Size (mm)	5.7 x 4.8	Terminal Torque Value (Nm)	1.2
Terminal Capacity - Solid (mm²)	3 x 2.5 or 2 x 4		
Single Pole Switched	Yes		
3 Pin Safety Shuttered	Yes		
Twin Earth Terminals	Yes		
Protocol	Zigbee	Signal Transmission Frequency	2.4GHz
Open Air Wireless Range (M)	<160		
Standby Current (mA)	1		
Indicator Colour	White & Orange		
Minimum Back Box Depth (mm)	35		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	3		

Standards BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
3 pin safety shutter. The shutter will only open once all three plug pins are inserted.
Zigbee signal mesh
Enables manual control (unless locked), wireless control and automated control
Voice control via ClickSmart+ Hub using Alexa and/or Google Home

Components Supplied

Smart Socket Outlet, Fixing Screws, Cover Plate, Instruction Manual

Programming Information

With hub and app setup and socket wired and powered, press one of the switches for five to ten seconds, the orange LED indicator starts flashing. Can be paired with hub via app.

