

CARLTON T5 DALI TUBE 4000K (5FT) 20W (EXC. DRIVER)

NET-55-01-06







Key Data

Power20WLuminous Flux2600lmColour Temperature4000KIP RatingIP20

Dimensions 1463.2 x 22mm

Warranty 5 Years (Registration Required)

Compatible Accessories

NET-61-33-01	Foxlux Self Test Emergency Kit 5W
NET-50-12-10	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-50-33-01	Streamer 3H Emergency Kit 4.5W
NET-19-33-17	Liteplan DALI Emergency Kit 5W
NET-55-16-02	LED Tube Replacement Starter

NET LED Lighting

Buckingway Business Park, 300 Anderson Road, Swavesey, Cambridge, CB24 4UQ



Technical Specifications

Power Factor>0.95LED ManufacturerSananLED TypeSMD 2835Total Circuit Power (W)20WElectrical Class2Colour Rendering>80 CRILamp Viewing Angle120°

Dimmable Yes (requires Driver)
Operating Temp. -15°C to +45°C


Lifespan LM80 50,000 Hours

UGR Rating 22

Manufacturer Wiscoon Tech Co. Ltd.

Fire Rating V2
Housing Colour White
Housing Material Aluminium
Diffuser Material Polycarbonate

Dimming Input Type DALI




Other Options

	Description
NET-55-01-14	Carlton T5 DALI Tube 4000K (3ft) 12W (inc. Driver 66V @ 150mA)
NET-55-01-02	Carlton T5 DALI Tube 4000K (3ft) 12W (exc. Driver)
NET-55-01-16	Carlton T5 DALI Tube 4000K (4ft) 16W (inc. Driver 66V @ 200mA)
NET-55-01-04	Carlton T5 DALI Tube 4000K (4ft) 16W (exc. Driver)
NET-55-01-18	Carlton T5 DALI Tube 4000K (5ft) 20W (inc. Driver 66V @ 250mA)
NET-55-01-06	Carlton T5 DALI Tube 4000K (5ft) 20W (exc. Driver)



Buckingway Business Park, 300 Anderson Road, Swavesey, Cambridge, CB24 4UQ



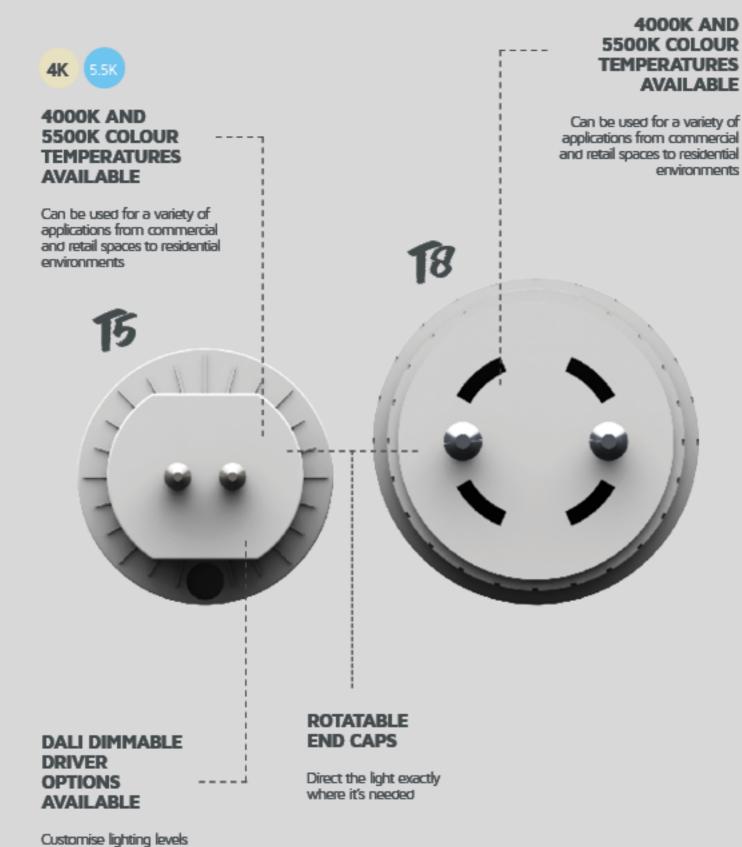

and reduce electricity

DALI options only

consumption