


Z LED PERFORMANCE



- Robust, high efficacy, LED low/high bay for industrial, commercial and retail applications
- CCT selectable between 4000K, 5000K and 6500K
- Intelligent plug and play emergency pack option offers a quick and simple conversion from standard to emergency highbay
- Plug and play microwave and PIR sensor options, offering maximum energy saving
- Die-cast powder coated construction and heatsink for optimum thermals and performance
- Alternative installation options by means of jack chain and catenary wire
- Additional 55° narrow lens option ideal for racking aisles
- Bracket accessories available for ceiling or wall mounting
- Pre-wired with 1.5M of H07RN-F cable for ease and speed of installation
- 1-10V dimmable as standard
- Integrated 6kV surge protection



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220/240V	50/60Hz	-20°C to 40°C	L90 50,000	80	6	120°	1	IP65	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	B
AZLP1/1	CCT Selectable	100W	4000K/5000K/6500K	18000lm	180lm/W	255mm	124mm
AZLP2/1		150W		27000lm		310mm	130mm
AZLP3/1		200W		36000lm		355mm	135mm

CODE (OPTIONS)	DESCRIPTION
/DD	Digital Dimming (DD3)

CODE (OPTIONS)	DESCRIPTION
/OCTO	OCTO Smart Control

CODE (ACCESSORIES)	DESCRIPTION
AHHB/1	Hawk Highbay Emergency Kit
AZLP/MWS	Z LED Performance Plug-in MWS Sensor
AZLP/PIR	Z LED Performance Plug-in PIR Sensor
AZLP/P	Z-LED Performance Sensor Programmer
AZLP/FB1/1	Z LED Performance 1 Mounting Bracket
AZLP/FB2/1	Z LED Performance 2 Mounting Bracket
AZLP/FB3/1	Z LED Performance 3 Mounting Bracket

CODE (ACCESSORIES)	DESCRIPTION
AZLP1/REF/1	Z LED Performance 1 Aluminium Reflector
AZLP2/REF/1	Z LED Performance 2 Aluminium Reflector
AZLP3/REF/1	Z LED Performance 3 Aluminium Reflector
AZLP1/L55	Z-LED Performance 1 High Bay 55° Lens
AZLP2/L55	Z-LED Performance 2 High Bay 55° Lens
AZLP3/L55	Z-LED Performance 3 High Bay 55° Lens

Z LED PERFORMANCE

407

FITTED WITH **HAWK HIGHBAY** EMERGENCY KIT

Super fast install utilising speedy terminals and pre-wired connection

IP65 Self-Test/DALI and OCTO Insight Wireless Emergency pack

Innovative heat shield disperses heat around and away from the Hawk Emergency pack

Easy plug-in emergency plug and socket

Heavy duty snap-hook allows for fast and secure installations; also ensuring perfect weight distribution for horizontal hanging



IP65 plug-in programmable PIR and microwave sensor options, with built-in daylight sensor, provides flexible controls for all applications




Self-Test Indicator

Self-Test indicator provides instant and clear reading, ensuring a quick and simple testing process



Lever Terminals

Fast fit lever terminals ensure a quick and easy installation

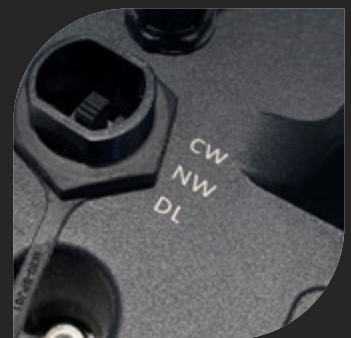

CCT Switch

Easily accessible CCT switch placement ensures easy selection during installation