


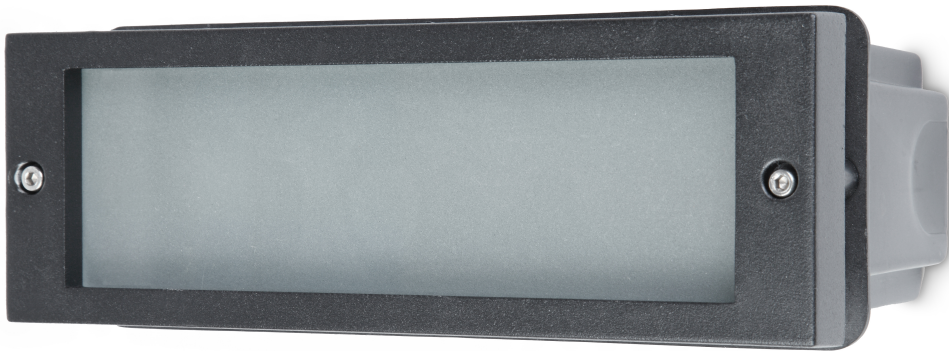

Epping

Standard LED brick light, Black

The Kosnic LED brick lights are available in versions suitable for ground or wall mounting. The wall mounting versions are also available as either horizontal (standard) or vertical orientation. Made from die-cast aluminium with a polycarbonate diffuser the weather resistant brick lights are perfectly suited for commercial and domestic outdoor illumination of driveways, thoroughfares, car parks and other outdoor spaces. They are available in black or grey finish.

KBRK112STD-BLK

Specification

Voltage (eg 220-240 Vac 50/60Hz)	220-240Vac 50-60Hz
Current (mA)	95
Rated Power (W)	12
CCT Words	Cool White
CCT (K)	4000
Beam Angle(°)	63
Nominal Lifetime (h)	40000
Total Luminous Flux (lm)	320
Power Factor	0.55
SDCM of CCT	<6
Flicker %	16
Dimensions L x W x D (mm)	231.5 x 116 x 77.5
Weight (kg)	0.93
In-rush current (peak/duration) (A)	8.55 / 140 us
Protection Rating	Class I
IP Rating	IP65
Ambient Temperature Range (°C)	-20 to 50

Light Source Specification

Light Source Cap Type (or other interface)	Terminals
Dimmable (Y/N/Specific dimmer)	N
CRI	>80
Lumen Maintenance Factor (x.xx)	0.75

Technical Drawings

