

nigLON


Circuit Protection

DRT2471D

Digital 24Hr Timer



Technical Drawing

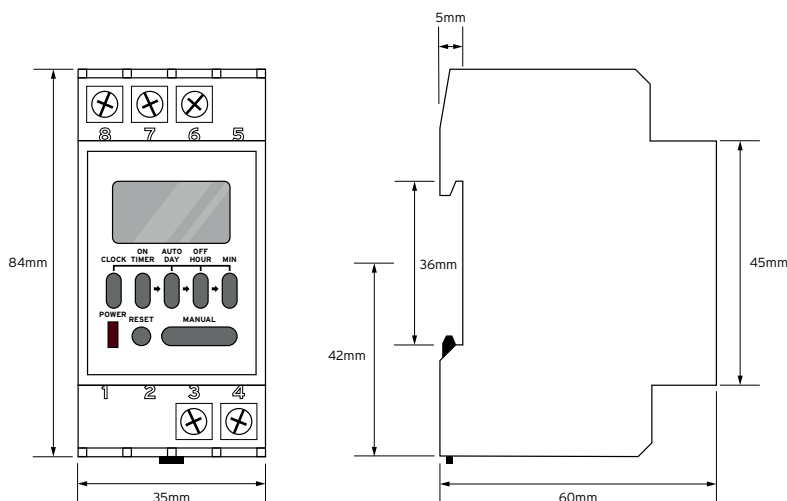

Technical Specifications

| | |
|--------------------------|---|
| Frequency | 45-60Hz |
| Contact | Changeover Contact |
| Current Consumption | approx 7VA |
| Running Accuracy | $\leq \pm 1$ second/day at 20°C |
| Switching Capacity | 16A, 120/240Vac Resistance 8A 120/240Vac, General Use 1/2HP, 120/240Vac |
| Switching Command | 1 Minute |
| Switching Accuracy | Precise-to-minute |
| Memory Back-up | Lithium Battery CR2032 or High Technique Gold Capacitor for Power Reserve more than 36 Hours After Fully Charged |
| Admissible Ambient temp. | -10°C to 55°C |
| Dimensions | 84mm L x 35mm W x 60mm H |