


# IP65 8W T5 3 HOUR MAINTAINED EMERGENCY WHITE BULKHEAD

LAMP INCLUDED / 8W / IP65

- Requires: 1 x 8W G5 T5 300mm fluorescent tube (included). Fitting is rated at 8W max
- Polycarbonate construction • Internal or external use
- Hinged gear tray: easy installation and maintenance
- Minimum 3 hour functionality in emergency mode
- Push fit terminal block: allowing for quicker and easier installation
- Dedicated self adhesive legend pack included (**LGDSET**): allows multiple exit path designation options
- Facility for remote switching • Facility for non-maintained mode
- Double fuse protection: one each for switched supply and permanent supply
- Lumen output mains: 200 lm • Lumen output battery: 60 lm
- **T5EM3M** = M.O.M: 1 / O.P.Q: 12
- **LGDSET** = M.O.M: 12 / O.P.Q: 12



## BULKFRAME - BULKHEAD FRAME

- For use with T5EM3M
- Pressed steel construction • Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 350mm x 117mm
- M.O.M: 1 / O.P.Q: 12

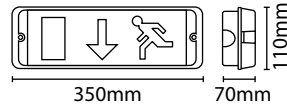

Code  
**T5EM3M**

All legends comply with current regulations

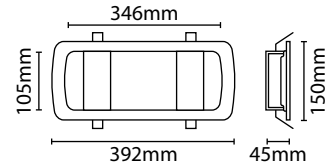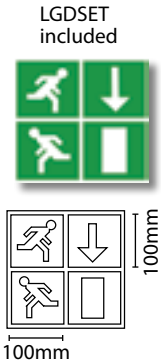


# IP65 8W T5 3 HOUR MAINTAINED / NON MAINT. EMERGENCY BULKHEADS

LAMP INCLUDED / 8W / IP65


- Requires 1 x 8W G5 T5 300mm fluorescent tube (included). Fitting is rated at 8W max
- Polycarbonate construction
- Dedicated self adhesive legend pack included (**LGDSET**): allows multiple exit path designation options
- Hinged gear tray: easy installation & maintenance
- Internal or external use
- Lumen output mains: 133.9 lm • Lumen output battery: 75 lm
- **Fitting / Legend** = M.O.M: 12 / O.P.Q: 12

## YD630M:

- Facility for non-maintained mode
- Facility for remote switching

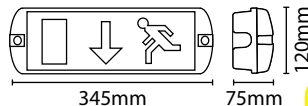


All legends comply with current regulations

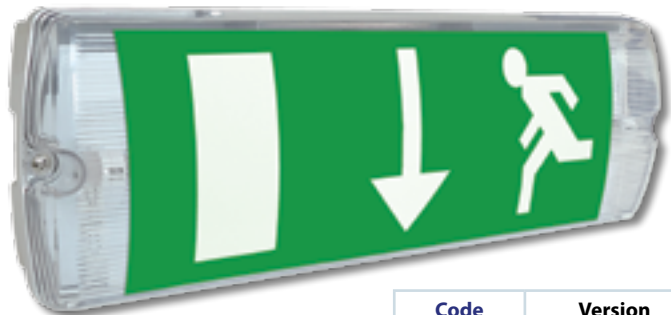

Code	Version
<b>YD630M</b>	<b>Maintained</b>
<b>YD630NM</b>	<b>Non Maintained</b>

## SRBULKWH - SEMI RECESSED BULKHEAD FRAME:

- Pressed steel construction • Spring retaining clips
- For use with emergency bulkheads YD630M / YD630NM
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 355mm x 120mm
- M.O.M: 3 / O.P.Q: 12

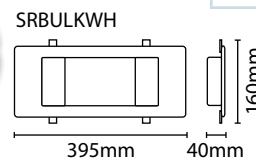


# IP65 28W EMERGENCY CARINA 2D HIGH FREQUENCY FITTINGS

LAMP INCLUDED / 28W / 3500K / 2050 lm / 10,000 hrs / IP65

- Requires 1 x 28W GR10q 4 pin DD CFL (included). Fitting is rated at 28W max
- This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
- Polycarbonate construction • Suitable for bathroom use
- Ceiling or wall mounted: versatile fixing
- High frequency electronic ballast: instant start, flicker free operation, and prolonged lamp life
- Removable gear tray with retaining strap: easy installation and maintenance
- Fully tested to relevant standards
- 3 hour duration maintained operation
- M.O.M: 1 / O.P.Q: 10

Code	Colour
<b>CF28CREM3</b>	<b>Chrome</b>
<b>CF28WHEM3</b>	<b>White</b>
<b>REPLACEMENT LAMP</b>	
<b>DD28435</b>	



See [PAGE 64](#) for non emergency versions