



Technical Specification



Luckinslive 391235351



Description: 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures

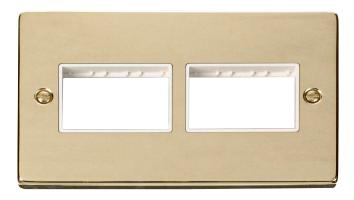



General Information

Plate Dimensions (mm)	146 (W) x 88 (H) x 8 (D)	
Dimensions With Gasket (mm)	149 (W) × 91 (H) × 9 (D)	
Plate Fixing Centres - Horizontal (mm)	120.6	
MiniGrid Plate (Gang)	2	
MiniGrid Single Width Module Quantity	2 X 3	
MiniGrid Double Width Module Quantity	2	
Style	Victorian	
Finish	Polished Brass	
Insert Colour	White	
Gasket Colour	White	
Materials	Front Plate: Stainless Steel	Insert: Urea
	Terminals: Brass	Terminal Screws: Steel & Yellow Passivated
	Earth Strap: Mild Steel	Gasket: Nylon
Anti Microbial Certified	No	
Termination Type	Screw	
Modular Rocker Switches	Yes	
Minimum Back Box Depth (mm)	Dependent On Modules Fitted	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	20	
Standards BS 5733		

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Interchangeable with modules in the MiniGrid Range.

Interchangeable with modules in the MiniGrid Range.

Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom **T:** +44 (0)1827 63454 | **F:** +44 (0)1827 63362 E: sales@scolmore.com | W: scolmore.com









