


Enclosed Switch Disconnectors 4 Pole - Stainless Steel



- BS EN 61439-1 (enclosure)
- BS EN 60947-3 (switch)
- IP65 (when fully fitted)
- Fully rated switched neutral
- 304 Grade
- Defeatable handle accepts 3 padlocks
- Shrouded Terminals
- See page 74 for Auxiliary contacts



Close up of the switch handle.

Part No.	Current AC23-A (A)	Terminal Bolt Size (mm)	Tightening Torque	Dimensions HxWxD (mm)	Qty
SS1604P	160	M8x25	15-22 Nm	400X400X200	1
SS2004P	200	M8x25	15-22 Nm	400x400x200	1
SS2504P	250	M10x30	30-44 Nm	400x400x210	1
SS3154P	315	M10x30	30-44 Nm	600x600x300	1
SS4004P	400	M10x40	30-44 Nm	600x600x300	1
SS6304P	630	M12x40	50-75 Nm	600x600x300	1
SS8004P	800	M12x40	50-75 Nm	1000x800x300	1
SS10004P	1000	M12x60	50-75 Nm	1000x800x300	1
SS12504P	1250	M12x60	50-75 Nm	1000x800x300	1

New and Improved Sizing for 2023 - More sizes available on request



Fuse Switches - Mild Steel



- BS EN 61439-1 (enclosure)
- BS EN 60947-1&3 (switch)
- BS EN 60269-1 (fuseholder)
- IP54 (when fully fitted)
- RAL 7035
- Defeatable handle accepts 3 padlocks
- Shrouded Terminals
- Top and bottom entry gland plates
- Fitted with fully rated fuselinks



Close up of the switch handle.


Note: The fuse link size must not exceed the maximum rating of the fuse carrier or the switch.

Part No.	Fuselink Size (mm)	Current AC23-A (A)	Tightening Torque	Terminal Capacity (mm²)	Dimensions HxWxD (mm)	Depth Including Switch (mm)	Qty
MS203PFS	10x38	20	1.7 Nm	10	300x250x150	194	1
MS323PFS	10x38	32	1.7 Nm	10	300x250x150	194	1
MS633PFS	22x58	63	2.5 Nm	35	500x300x200	224	1
MS803PFS	22x58	80	2.5 Nm	35	500x300x200	224	1
MS1003PFS	22x58	100	2.5 Nm	35	500x300x200	224	1

Fuses - Fully rated fuse links fitted

Cylindrical Fuses - Standard gL

- BS EN 60269-1&2
- General line gG characteristic
- Ceramic body

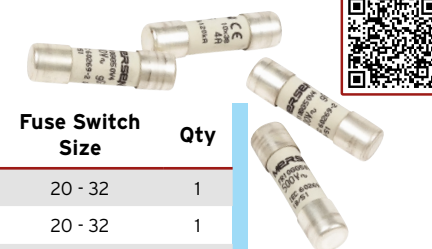

Part No.	Amp (A)	Rated Voltage/ Breaking Capacity	Dimensions HxWxD (mm)	Fuse Switch Size	Qty
G1038-16	16	500V / 120kA	10x38	20 - 32	1
G1038-20	20	500V / 120kA	10x38	20 - 32	1
G1038-25	25	500V / 120kA	10x38	20 - 32	1
G1038-32	32	400V / 120kA	10x38	20 - 32	1
G2258-40	40	690V / 80kA	22x58	63 - 100	1
G2258-50	50	690V / 80kA	22x58	63 - 100	1
G2258-63	63	690V / 80kA	22x58	63 - 100	1
G2258-80	80	690V / 80kA	22x58	63 - 100	1
G2258-100	100	500V / 120kA	22x58	63 - 100	1

Discount structure on these items differs to the standard discount used throughout this catalogue.