

LED IP44 Recessed Downlights

LED IP44 Recessed Downlights

IP44

WARRANTY
2
YEAR

120°
BEAM ANGLE

20,000 Hours
LIFETIME

AVAILABLE FINISHES

WHITE

Pre-wired
flow
Connector

COLOUR TEMPERATURE


WARM
WHITE

COOL
WHITE

CODE	DESCRIPTION
OV6218WW	18W 225mm Diameter Downlight 3000K - White
OV6218CW	18W 225mm Diameter Downlight 4000K - White

COMPATIBLE PRODUCTS	
OVEMCG50	3 Hour Emergency Pack

PRODUCT INFO		
CCT (K)	3000K	4000K
Lumens	1300lm	1300lm
Efficacy	72lm/W	72lm/W
Wattage	18W	
CRI	>80	
Beam Angle	120°	
LED Lifetime	20,000 Hours	
Voltage	230V~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

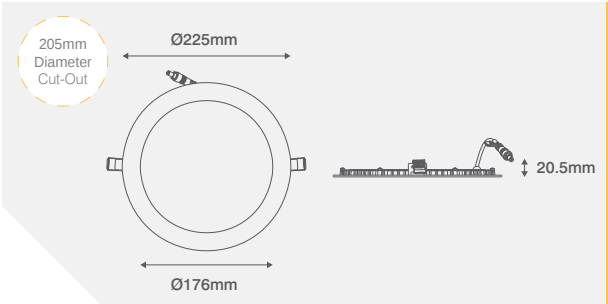

Inline LED Driver & prewired Flow™ Connector

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 62031 EN 61347-1 EN 61347-2-13 EN 62493



20,000 Hours
LIFETIME

120°
BEAM ANGLE

WARRANTY
2
YEAR

IP44

AVAILABLE FINISHES

WHITE

Pre-wired
flow
Connector


COLOUR TEMPERATURE

WARM
WHITE

COOL
WHITE

PRODUCT INFO		
CCT (K)	3000K	4000K
Lumens	1800lm	1800lm
Efficacy	75lm/W	75lm/W
Wattage	24W	
CRI	>80	
Beam Angle	120°	
LED Lifetime	20,000 Hours	
Voltage	230V~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

CODE	DESCRIPTION
OV6224WW	24W 300mm Diameter Downlight 3000K - White
OV6224CW	24W 300mm Diameter Downlight 4000K - White

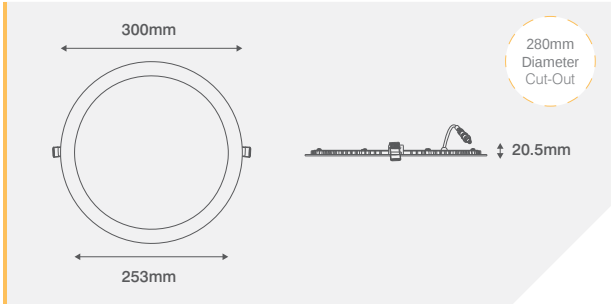

PRODUCT APPROVALS

Inline LED Driver & prewired Flow™ Connector

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 62031 EN 61347-1 EN 61347-2-13 EN 62493

