


HARLTON LOW BAY 5700K 120W MICROWAVE SENSOR

NET-51-12-99

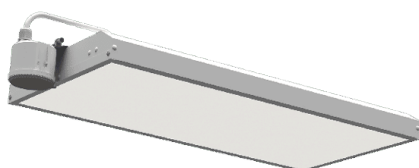

Features & Benefits

- Microwave Dimming Sensor with up to 15m detection range (5-150lux)
- 0%, 10% or 25% Standby Mode
- Recommended for mounting at height between 4-8m
- Includes V-Bracket for suspension
- Tridonic driver as standard
- 5700K colour temperature

Key Data

Power	120W
Luminous Flux	16000lm
Colour Temperature	5700K
IP Rating	IP20
Dimensions	690 x 320 x 52.6mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-46-16-08	Universal LED Low Bay Suspension Kit
NET-42-43-22	Merrytek Remote Control for Sensors

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	130lm/W
LED Manufacturer	Runlite
LED Type	SMD 2835
No. of LEDs	756
Driver Manufacturer	Tridonic Advanced Series
Total Circuit Power (W)	120W +/- 5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	0°C to +40°C
Lifespan LM80	80,000 Hours
UGR Rating	>22
Weight	2.5Kg
Manufacturer	Sealite Co. Ltd
Max. Detection Distance	15m
Housing Colour	White
Housing Material	Aluminium
Detection Angle	360°
Diffuser Material	Polycarbonate
Sensor Manufacturer	Sealite Co. Ltd.
Sensor IP Rating	IP65

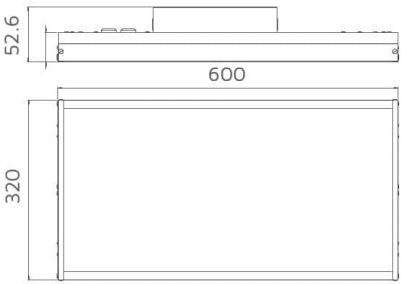

Other Options

Description	
NET-51-12-96	Harlton Low Bay 5700K 120W Standard
NET-51-12-86	Harlton Low Bay 5700K 120W Emergency
NET-51-12-99	Harlton Low Bay 5700K 120W Microwave Sensor
NET-51-12-89	Harlton Low Bay 5700K 120W Microwave Sensor Emergency
NET-51-12-94	Harlton Low Bay 5700K 120W PIR Sensor (up to 6m)
NET-51-12-84	Harlton Low Bay 5700K 120W PIR Sensor Emergency (up to 6m)

NET LED Lighting
Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

 **ORDER BY 6PM**
FOR NEXT DAY DELIVERY

130
lm/W

20W HIGH OUTPUT EMERGENCY OPERATION

Ensures the fitting comes on in
the event of a power failure

Emergency options only

MICROWAVE SENSOR AND PIR SENSOR OPTIONS AVAILABLE

Choose between a
Microwave Sensor with
0, 10 or 25% Standby
Mode with 15m
detection range, or a
PIR Sensor with
6m detection range

5700K COLOUR TEMPERATURE

Bright and crisp light best used
for industrial spaces

5.7K