






Category	High/Low Bay
Application	Ancillary, Hospitality, Industrial, Retail
Specification	Performance

Z LED Linear

Z LED Linear 2 Emergency

Code: AZPLLED/2/M3



PRODUCT FEATURES

- Powerful and durable surface mounted IP65 linear high bay, perfect for the demands of industrial applications
- 1.5m Suspension kit supplied as standard
- Plug and play microwave sensor option, offering maximum energy saving
- Surface mounting possible with AZPLLED/LC accessory
- Die-cast aluminium construction provides enhanced thermal performance for longer LED lifespan
- 0/1-10V dimmable as standard (installer must drill through pilot hole and use an IP rated gland on install)

GENERAL INFORMATION

Wattage	150W
Lumens Delivered	21000lm
Lm/W	140lm/W
Beam Angle	25/115
CRI	80
CCT	5000K
Input	220/240V
Operating Temp	0°C - 45°C
SDCM	4
Product Weight without Packaging	8.11 kg

TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	Black
IP Rating	IP65
Class Protection	1
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Suspended
Lumen Depreciation	L80 54,000h
Warranty (Years)	5
CE Mark	Yes
Height	134 mm
Accessories	AZPLLED/MWS, AZPLLED/LC, AZPLLED/MWSP
Emergency Output Duration	3 Hr





Category	High/Low Bay
Application	Ancillary, Hospitality, Industrial, Retail
Specification	Performance

Z LED Linear

Z LED Linear 2 Emergency

Code: AZPLLED/2/M3

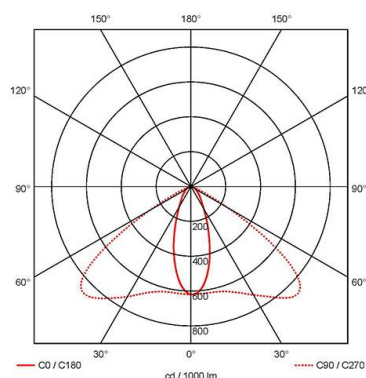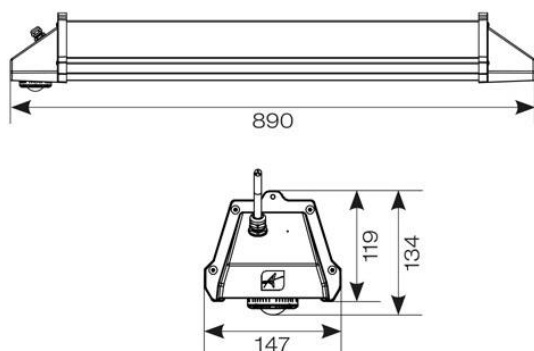

ACCESSORIES

AZPLLED/MWS	Z LED Linear Plug-in Microwave Sensor
AZPLLED/LC	Z LED Linear Linking Connector
AZPLLED/MWSP	Z LED Linear Microwave Sensor Programmer