

For EC2560CT, EC25100CT, EC25125CT, EC25160CT, EC25200CT, EC25250CT

- Accuracy Class 1
- Aperture: 3 @ 21 x 25mm
- Primary Current: 60 to 250A
- 35mm hole centres
- Housing Material Self extinguishing Nylon
- IEC185 classification VO according to UL-94
- Reference standard EN60044-8
- Weight : 550g

Description

This is a 105mm wide three phase measuring current transformer designed for use with Hager x250 MCCBs and the plug-in multifunction power meters. This current transformer has three 21 x 25mm holes and is available with primary currents from 60 to 250A. (x250, h250 frame MCCBs)


Internal safety circuitry is provided which limits the output voltage to a safe level, allowing the transformer secondary to be left disconnected under load.

Fixing

Busbar mounting and fixing feet included.



Dimensions (mm)

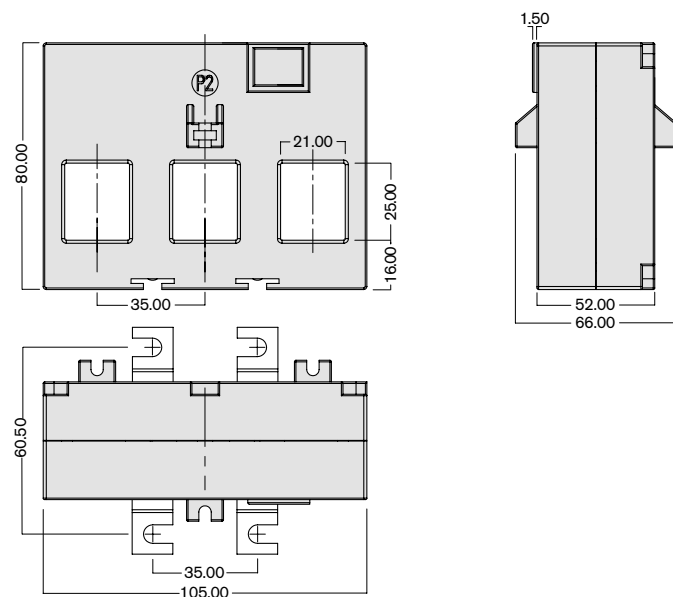

Accessories

DIN rail mounting clip.

Installation

The CT uses plug-in technology allowing much faster installation saving you time and money. Additionally, all our three phase current transformers have been designed with hole centres and apertures to fit most standard industrial circuit breakers.

Current Transformer Ratios

Cat ref.	A	mV
EC2560CT	60	330
EC25100CT	100	330
EC25125CT	125	330
EC25150CT	150	330
EC25160CT	160	330
EC25200CT	200	330
EC25250CT	250	330