


[◀ Back to Search results for "BF359/3S" \(3 other results\)](#)

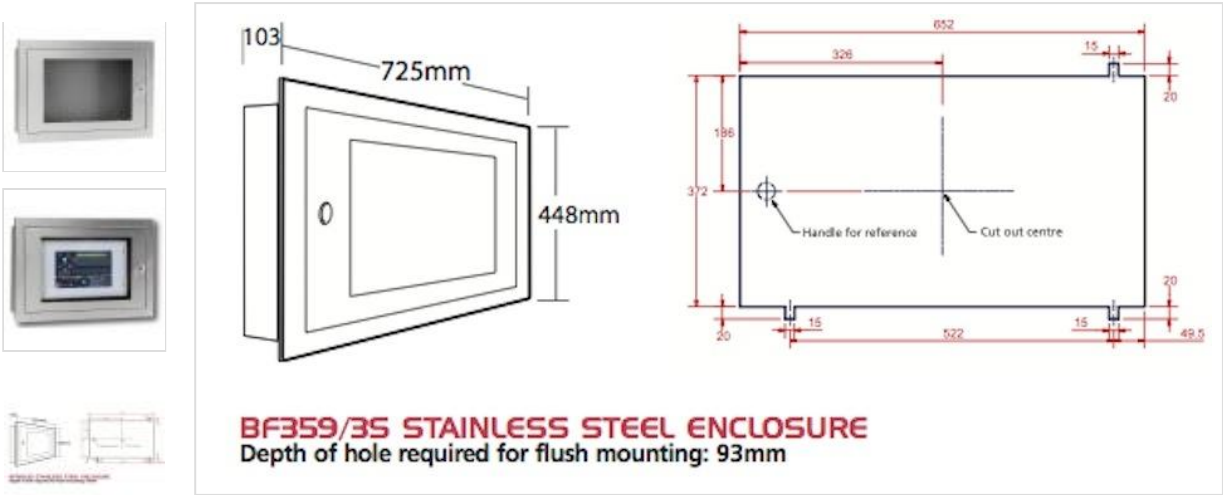

Glazed Stainless Steel Enclosure, shallow

Part No. BF359/3S

- An attractive flush-mounting glazed stainless steel enclosure ideal for housing a number of C-TEC-manufactured control panels.
- Compatible products include XFP 1-2 loop 32 zone fire panels and Quantec controllers.
- Optional BF359/3CL (Camlock kit) or BF359/3SL (Electromagnetic solenoid lock kit) also available.
- Helps protect control equipment from unauthorised access/tampering
- High quality brushed stainless steel finish.
- Picture shows a BF359/3S enclosure with an XFP 1 Loop 32 Zone panel fitted.





Technical Specifications	
Compatibility	Suitable for use with XFP 1-2 Loop 32 Zone Fire Panels; QT601-2 Quantec Controllers; ECU-8NT SigTEL Controllers (without handsets).
Product dimensions (mm)	725 W x 448 H x 103 D mm (overall dimensions); 650 W x 370 H mm (back box); 725 H x 448 H x 10 D mm (bezel). Flush mount depth for wall-mounting 93 mm.
Construction & finish	Polycarbonate front window; Brushed stainless steel door and bezel; Mild steel back box;

IP Rating	TBC.
Weight	9.3 kg

Spares & Accessories ^	
BF359/3CL	CAM lock kit for BF359/3S enclosoure
BF359/3SL	Electromagnetic solenoid lock kit for BF359/3S enclosure

BIM/CAD Drawings v

Documentation v

Accessories ^	
	
XFP 1 Loop 32 Zone Addressable Fire Panel (Hochhaus)	XFP 2 Loop 32 Zone Addressable Fire Panel (Hochhaus)
	
XFP 1 Loop 32 Zone Addressable Fire Panel (XP95)	XFP 2 Loop 32 Zone Addressable Fire Panel (XP95)



Quantec Controller

11 other products in the same category:



CONTACT US

 C-TEC , Challenge Way, Wigan, WN5 0LD, UK Opening times: 08:30 - 17:00 GMT.

 +44 (0) 1942 322744

 sales@c-tec.co.uk

 Download map