

For EC1260CT, EC12100CT, EC12125CT, EC12160CT

- Accuracy Class 1
- Aperture: 3 @ 15.5 x 30mm
- Primary Current: 60 to 160A
- 25mm hole centres
- Housing Material Self extinguishing Nylon IEC185 classification VO

Description


This is a 75mm wide three phase measuring current transformer designed for use with Hager x160 MCCBs and the plug-in multifunction power meters. This current transformer has three 15.5 x 30mm holes and is available with primary currents from 60 to 160A. (x160 frame MCCBs)
Internal safety circuitry is provided which limits the output voltage to a safe level, allowing the transformer secondary to be left disconnected under load.

Fixing

Busbar mounting and fixing feet included.



Dimensions (mm)

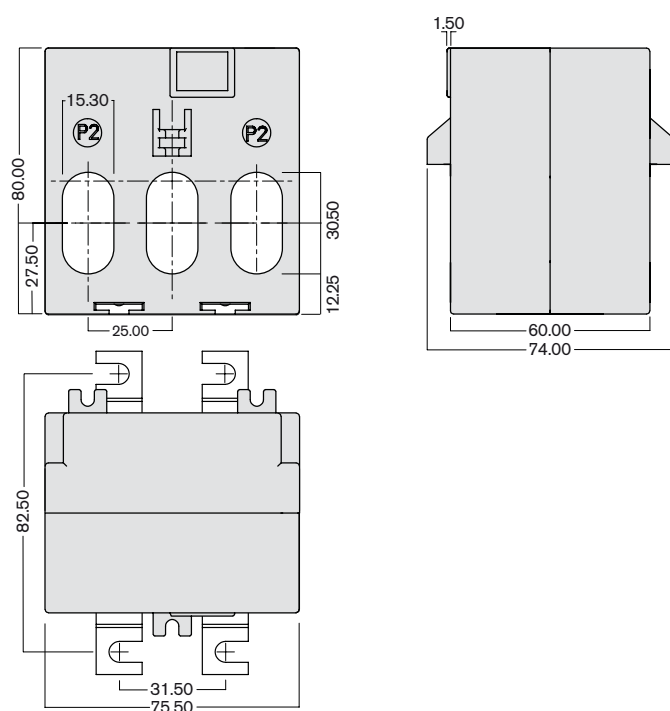

according to UL-94

- Reference standard EN60044-8
- Weight : 500g

Accessories

DIN rail mounting clip.

Installation

The CT uses plug-in technology allowing much faster installation saving you time and money. Additionally, all our three phase current transformers have been designed with hole centres and apertures to fit most standard industrial circuit breakers.

Current Transformer Ratios

| Cat ref. | Primary current | Output |
|-----------|-----------------|--------|
| | A | mV |
| EC1260CT | 60 | 330 |
| EC12100CT | 100 | 330 |
| EC12125CT | 125 | 330 |
| EC12150CT | 150 | 330 |
| EC12160CT | 160 | 330 |