

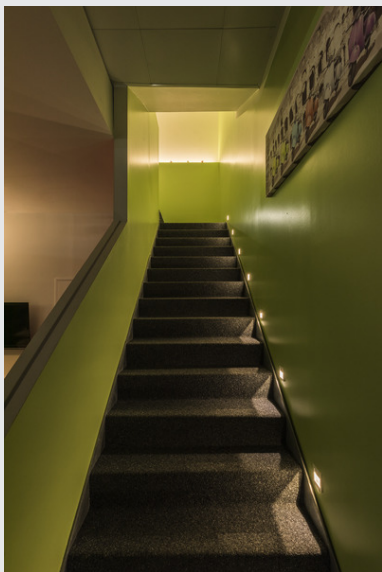




FRAME CURVE

recessed fitting, LED, 3000K, square, silver-grey, incl. leaf springs

With our FRAME series we offer you a lighting solution for recessed wall and ceiling installation with minimum space requirements. The LED version is equipped with a durable diode and available in either pure white or warm white light colour. To operate, the FRAME CURVE needs a suitable constant current driver rated at 350mA. The optional accessory includes a connector strip for simplified wiring in addition to the mounting box and flush-mount frame. This luminaire contains built-in LED lamps.



TECHNICAL DATA

Item no.	111292
IP Code	IP 20
Assembly	Recessed
Assembly details	Wall
Secondary power / voltage	350 mA
Safety class	III
Wattage	1 W
Lumen	60 lm
Colour temperature	3000 Kelvin
Color	grey
CRI	90
LXXBXX data	L70B50
Service life	30000 h
Light distribution	asymmetric
Light outlet	direct
Width	9 cm
Height	9 cm
Depth	4 cm
Net weight	0.14 kg
Gross weight	0.198 kg
Shape of cut-out	square
Installation length	8.1 cm

Light Source

954799	
--------	---

Accessories

111850	MULTIWAY CONNecTOR , 3 outputs with two bridges, black, max. 350-mA
111860	MULTIWAY CONNecTOR , 6 outputs with three bridges, black, max. 350mA
112780	FLUSH-MOUNTED , FRAME, for FRAME BASIC, FLAT FRAME BASIC, FLAT FRAME CURVE and FRAME CURVE
112781	MOUNTING BOX , for FRAME BASIC, FLAT FRAME BASIC, FLAT FRAME CURVE and FRAME CURVE
464107	LED DRIVER , 3VA, 350-mA, with AMP plug, incl. strain relief

Installation width	6.9 cm
Installation depth	4.5 cm
BIG WHITE Page	408