


MODULAR FUSE-HOLDERS FOR FUSE-LINKS IN ACCORDANCE WITH IEC 60269 -2 TYPE MS

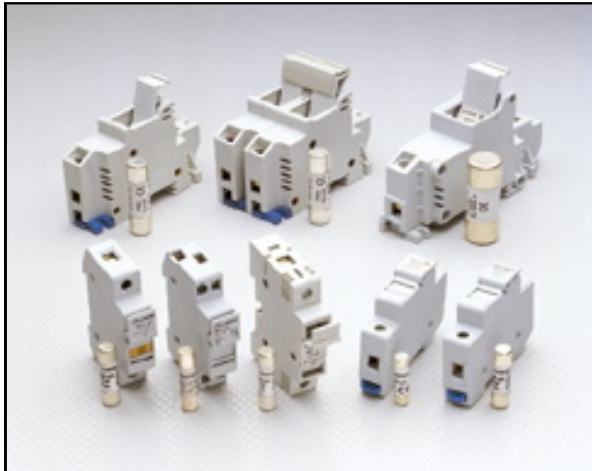


The MS range of modular fuse-holders offer fuse protection in four popular frame sizes in voltage ratings up to 660 V.a.c. Modular fuse-holders accept cylindrical fuse-links up to a maximum rating of 125 Amps, with principle dimensions of 8.5 x 31.5, 10.3 x 38, 14 x 51 and 22 x 58mm. Conversion kits are available to assemble 2,3 or 4-pole units.

List Reference	Current Rating (A)	Dimensions (mm)	Lawson Fuse-Link	Solid Link	Colour
MSC 81 MSC 81 N	20	8.5x31.5	LPVG 8	SLLPV 820	Grey
MSC 101 MSC 101 / MSC 101 N	32	10.3x38	LPVG 10 LPVM 10	SLLPV 10 32	
MS 101 MS 101 N	50	14x51	LPVG 14 LPVM 14	SLLPV 14 50	
MS 141 MS 141 N	125	22x58	LPVG 22 LPVM 22	SLLPV 22 125	
MS 221 MS 221 N					

/ = Indicator, N= Integral Neutral link

Modular Fuse-Holder Dimensional Drawings

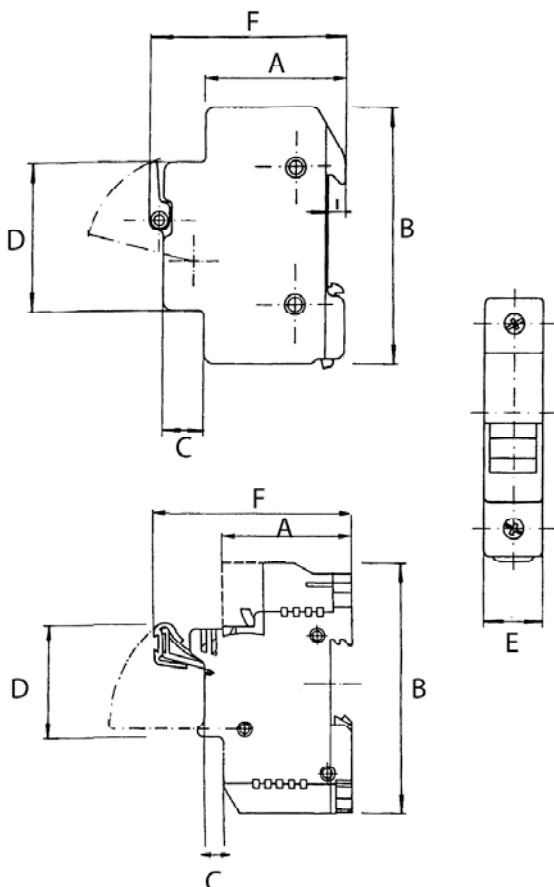

MSC 8 & 10
Dimensions mm

MSC	A	B	C	D	E	F
8 10	42	77	12	45	17.5	59

MS 10, 14 & 22
Dimensions mm

MS	A	B	C	D	E	F
10	43	77	14	45	17.5	64
14	52	110	11	45	25	81
22	52	140	14	45	35	89