

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to.

All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation. All connections should be inspected periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS

Europa Helpline: 01582 692 444 / **Email:** technical@europacomponents.com


Europa House, Airport Way, Luton, Beds, LU2 9NH Tel: 01582 692 440

e-mail: sales@europacomponents.com website: www.europacomponents.com



MODULAR CONTACTORS

EUC2-63-2P (63A 2P) | EUC3-125-2P (125A 2P) | EUC6-125-4P (125A 4P)

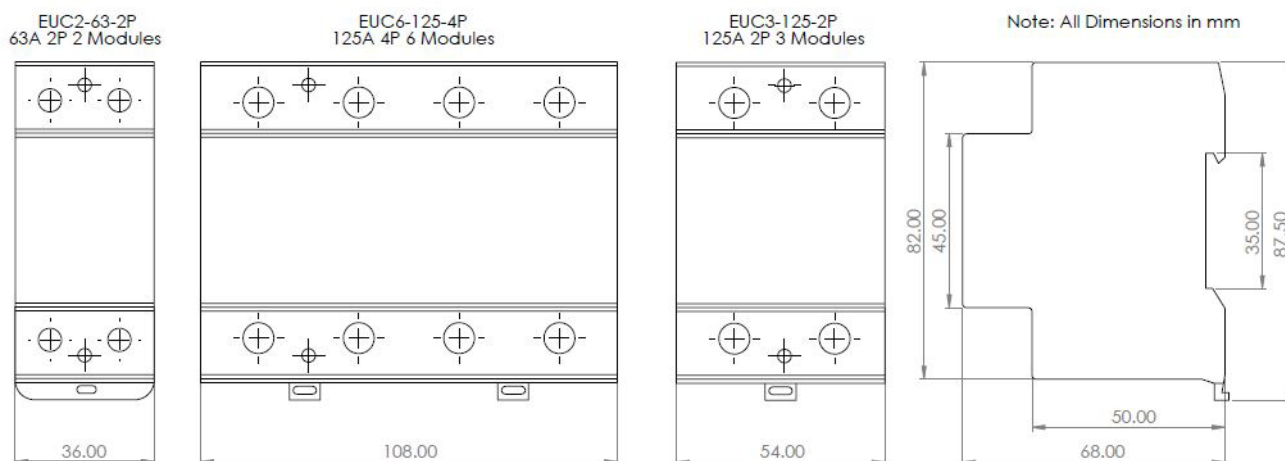

Modular Contactor Specifications	EUC2-63-2P	EUC3-125-2P	EUC6-125-4P
No. of modules wide	2 Modules	3 Modules	6 Modules
Width (mm)	36mm	54mm	108mm
Rated insulation voltage (Ui)	690V		
Rated impulse voltage (Iimp)	6kV		
Rated operational current AC-1 (Ie)	63A	125A	125A
Rated operational power AC-1 (kW)	11.6kW 230V	20kW 230V	70kW 400V
Rated operational power AC-3 (kW)	3.3kW 230V	6.5kW 230V	25kW 400V
Power terminal capacity	25mm ²	50mm ²	
Coil terminal capacity	0.75-2.5mm ²		