

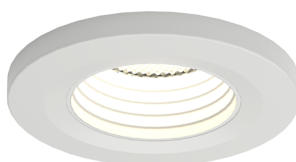


Category	Downlights
Application	Ancillary, Hospitality, Residential, Retail
Specification	Architectural

# Prism Pro Mini Anti Glare Fire Rated

Prism Pro Mini CCT Anti Glare Fire Rated Dual Wattage

Code: APRIPMINIAG/1

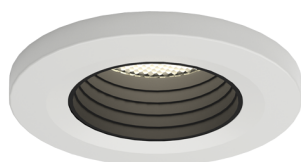

## PRODUCT FEATURES


- Miniature IP65 Fire rated architectural downlight suitable for residential and hospitality applications
- Ultra slim detachable driver with loop-in, loop-out push fit terminals provide an easy and efficient installation
- Supplied with matt white bezel as standard. Chrome, satin chrome and matt black bezels sold separately
- Low profile design and arched remote driver allows installation into shallow ceiling voids
- CCT selectable between 2700K, 3000K, 4000K and 6000K
- Can be used as the sole light source or as a complimentary product to Prism Pro / Prism Pro Anti-Glare
- Anti-glare design to create visual comfort
- Fully tested for 30, 60 and 90 minute ceiling types to meet Part B of Building Regulations

## GENERAL INFORMATION

Wattage	5W
Lumens Delivered	280lm (4000k)
Lm/W	60lm/W
Beam Angle	55
CRI	80
CCT	2700/3000/4000/6000K
Input	220/240V
Operating Temp	-5°C - 25°C
SDCM	6
UGR	20
Cut-Out Size	42mm
Energy efficiency class	E
Product Weight without Packaging	0.177 kg

## TECHNICAL INFORMATION

Light Source	LED
Colour / Finish	White
Fire Rated	Yes
IP Rating	IP65
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lumen Depreciation	L80 54,000h
Warranty (Years)	5
CE Mark	Yes
Diameter	55 mm
Height	63 mm

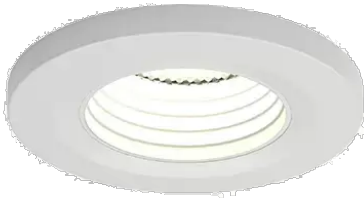

Category	Downlights
Application	Ancillary, Hospitality, Residential, Retail
Specification	Architectural

# Prism Pro Mini Anti Glare Fire Rated

Prism Pro Mini CCT Anti Glare Fire Rated Dual Wattage

Code: APRIPMINIAG/1

